


Central Article Code: B24033C48-C
 Local Code: EB457

Created: 09/02/2022
 Modified: 14/02/2022

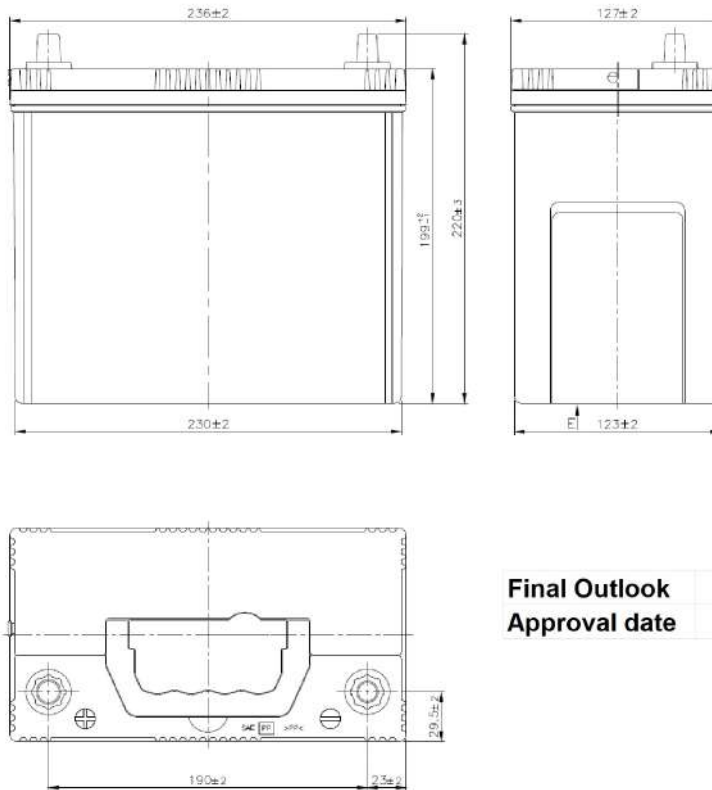

Final Outlook	B2448-C
Approval date	01/02/2022

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	45.0 20 h
Cranking (A):	330 EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca
Vibration:	V1 (30Hz+/-2Hz/3g/2h)
Endurance:	E1 (180 cycles@25%)

STD. DIMENSIONS

Length (mm ± 2):	237
Width (mm ± 2):	127
Height (mm ± 2):	227
Total Weight (kg ± 5%):	11.40

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	B24	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Double with Integrat	BLACK
Polarity:	ETN 1	
Terminals:	JIS taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	2 Filters	
Lateral Plug:	Standard	Left side RED shape

PLUGS

Type:	1 x Vent Sealed (JIS)	BLACK
-------	-----------------------	-------

HANDLES

Type:	1 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	No
-----------------	----