


Central Article Code: C77038L02-A
 Local Code: ELTX20H

Created: 29/09/2016
 Modified: 07/03/2017

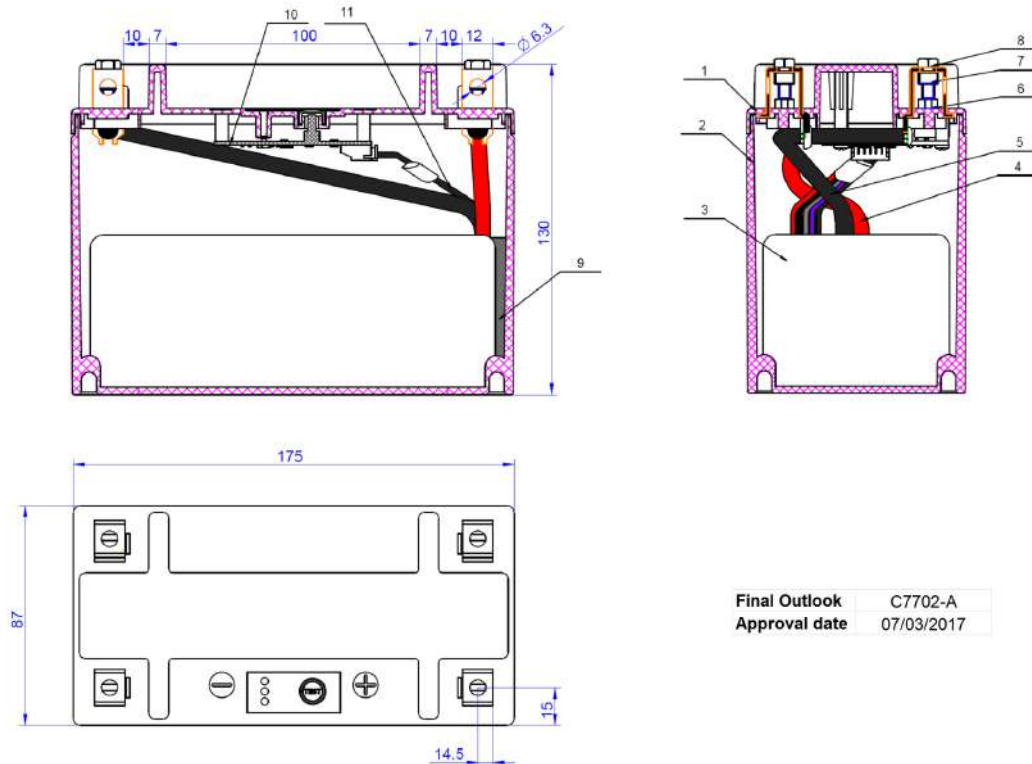

Final Outlook C7702-A
 Approval date 07/03/2017

PERFORMANCES		CONTAINER	
Voltage (V):	12 V	Type:	C77 BLACK
C20 (Ah):	7.0 10 h	Hold Down:	B0
Cranking (A):	380 25° test	H.D. Adapter:	No
Charge:	CHARGED	COVER	
Technology:	Li-ion	Type:	Motorbike (central ve ORANGE (Li-ion
Grid:	LiFePO4	Polarity:	ETN 1
Vibration:	3 axis acc. UN38.3 req.	Terminals:	M12 (Squad Terminals)
Endurance:	2000c at 50% DoD	Terminal Adapter:	No
STD. DIMENSIONS		SOCl:	Digital SOCl
Length (mm ± 2):	175	Ventilation:	Central
Width (mm ± 2):	90	Filter:	No
Height (mm ± 2):	130	Lateral Plug:	No
Total Weight (kg ± 5%):	1.30	PLUGS	
<p>All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.</p>		Type:	1 x Not defined NOT SIGNIFICANT
		HANDLES	
		Type:	None
		OTHERS	
		Degassing Tube:	No