


CUSTOMER DATASHEET


Printed: 14/02/2022


Product Management
Transportation Europe

Central Article Code: D05100C01-A Created: 28/06/2011

Local Code: EN1100 Modified: 31/07/2020

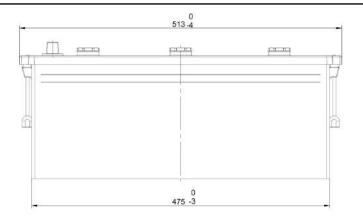



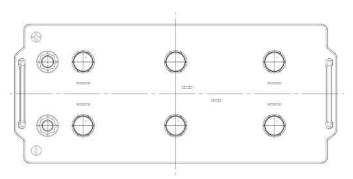

Final Outlook D0501-A Approval date 01/05/2015

| PERFORMANCES | | CONTAINER | | |
|---------------|--|-------------------|--------------|-------|
| Voltage (V): | 12 V | Type: | D05 | BLACK |
| C20 (Ah): | 180.0 20 h | Hold Down: | B0 | |
| Cranking (A): | 1000 EN | H.D. Adapter: | No | |
| Charge: | WET | COVER | | |
| Technology: | Vented/Flooded | Type: | Flat/Screw | BLACK |
| Grid: | Ca/Ca | Polarity: | ETN 3 | |
| Vibration: | V2 (30Hz+/-2Hz/6g/2h) | Terminals: | EN taper pos | t |
| Endurance: | E2 (90 cycles@50%) | Terminal Adapter: | No | |
| | 22 (00 0) 000000000000000000000000000000 | SOCI: | No | |
| | | Ventilation: | Independent | |

Filter:

Lateral Plug:

Degassing Tube:

STD. DIMENSIONS

 Length (mm ± 2):
 513

 Width (mm ± 2):
 223

 Height (mm ± 2):
 223

 Total Weight (kg ± 5%):
 42.80

Type: 6 x M27 BLACK
HANDLES

No

No

PLUGS

Type: 2 x Rope (Rigid holder) BLACK

No

OTHERS

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by EXIDE Technologies.