


CUSTOMER DATASHEET


Printed: 14/02/2022


Product Management
Transportation Europe

 Central Article Code:
 C50008F01-A
 Created:
 26/10/2006

 Local Code:
 ET7B-BS
 Modified:
 15/12/2020





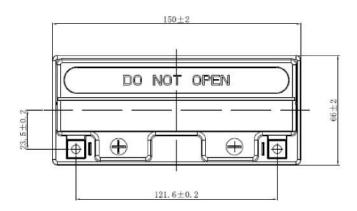

Final Outlook C5001-A Approval date 01/12/2009

PERFORMANCES			CONTAINER		
Voltage (V):	12 V		Type:	C50	BLACK
C20 (Ah):	6.5	10 h	Hold Down:	B0	
Cranking (A):	85	EN	H.D. Adapter:	No	
Charge:	DRY		COVER		
Technology:	AGM		Type:	Motorbik	e (independ BLACK
Grid:	Ca/Ca		Polarity:	ETN 1	
Vibration:	Not Defined		Terminals:	M04	
Endurance:	Not Defined		Terminal Adapter:	No	
			SOCI:	No	
			Ventilation:	Sealed	
STD. DIMENSIONS			Filter:	No	
Length (mm ± 2):	150		Lateral Plug:	No	
Width (mm ± 2):	65		PLUGS		
Height (mm ± 2):	95		Type: 1 x Vent		BLACK
Total Weight (kg ± 5%):	2.40	HANDLES			
			Type: None		
			OTHERS		
This is a dry battery supplied with bottles of sulphuric acid. Sale of acid to end users is forbidden by Eu.Reg.1148/2019. Dry batteries must be filled with acid before delivery to end users			Degassing Tube:	No	
All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.					

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by EXIDE Technologies.