


# **CUSTOMER DATASHEET**


Printed: 14/02/2022


Product Management
Transportation Europe

Central Article Code: D04070R16-A Created: 31/03/2009

Local Code: ET950 Modified: 05/09/2018

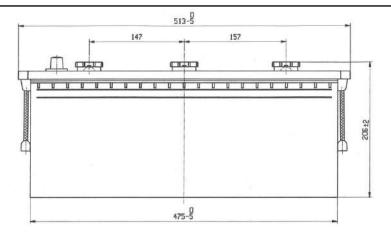



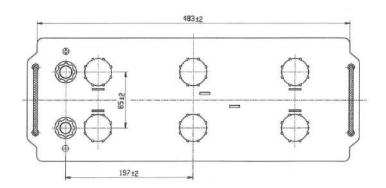

Final Outlook D0416-A Approval date 30/04/2009

| D |   | D | a     | D | N/ | IΑ | N | $\mathbf{c}$ |   | C |
|---|---|---|-------|---|----|----|---|--------------|---|---|
|   | _ | • | <br>_ |   | IV |    |   | u            | _ |   |

Voltage (V): 12 V

C20 (Ah): 135.0 20 h Cranking (A): 700 EN

Charge: WET

Technology: Semi-Traction

Grid: 4% Sb

Vibration: V3 (30Hz+/-2Hz/6g/20h)

Endurance: 300 cycles@75%

## CONTAINER

Type: D04 WHITE Hold Down: B0

H.D. Adapter: No

## COVER

Type: Flat/Screw WHITE

Polarity: ETN 3

Terminals: EN taper post

Terminal Adapter: No SOCI: No

Ventilation: Independent

Filter: No Lateral Plug: No

## **STD. DIMENSIONS**

 Length (mm  $\pm$  2):
 513

 Width (mm  $\pm$  2):
 189

 Height (mm  $\pm$  2):
 223

 Total Weight (kg  $\pm$  5%):
 39.50

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

#### **PLUGS**

Type: 6 x M27(STS) RED

## **HANDLES**

Type: 2 x Rope (Rigid holder) BLACK

## **OTHERS**

Degassing Tube: No