


Central Article Code: H52030L03-A
 Local Code: EV3800/36

Created: 07/07/2021
 Modified: 26/08/2021

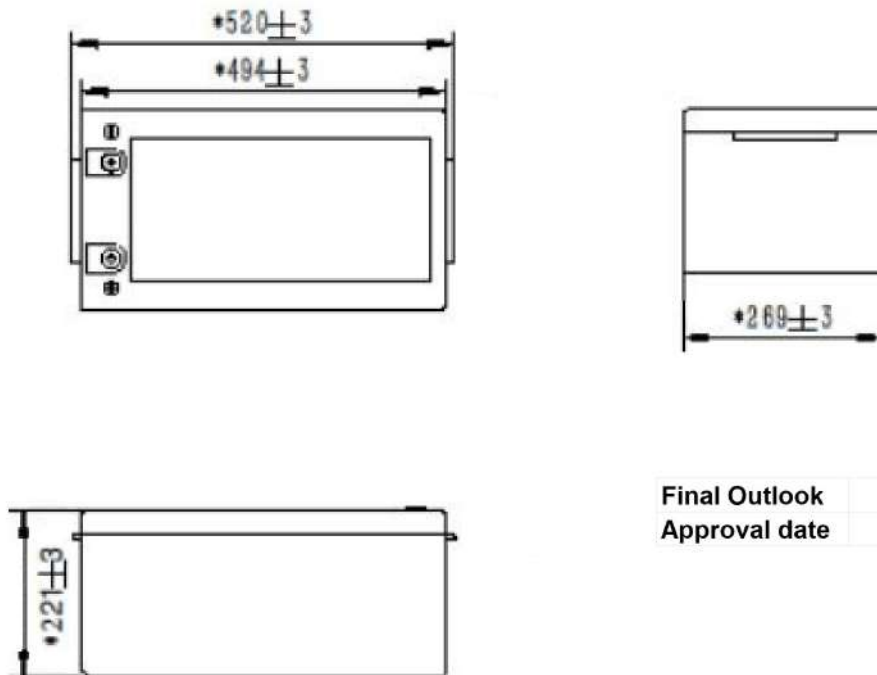

Final Outlook	H5203-A
Approval date	01/12/2021

PERFORMANCES		CONTAINER	
Voltage (V):	36 V	Type:	H52 BLACK
C20 (Ah):	100.0 03 h	Hold Down:	B0
Cranking (A):	0 3s @ 25° test	H.D. Adapter:	No
Charge:	CHARGED	COVER	
Technology:	Li-ion	Type:	Flat/Press BLACK
Grid:	LiFePO4	Polarity:	ETN 4
Vibration:	3 axis acc. UN38.3 req.	Terminals:	M08
Endurance:	4000c at 80% DoD	Terminal Adapter:	No
		SOCI:	No
		Ventilation:	Central
		Filter:	No
		Lateral Plug:	No
STD. DIMENSIONS		PLUGS	
Length (mm ± 2):	520	Type:	1 x Not defined BLACK
Width (mm ± 2):	269	HANDLES	
Height (mm ± 2):	221	Type:	2 x Rope BLACK
Total Weight (kg ± 5%):	39.00	OTHERS	
		Degassing Tube:	No
		TB-BL36100F-S110A	

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.