

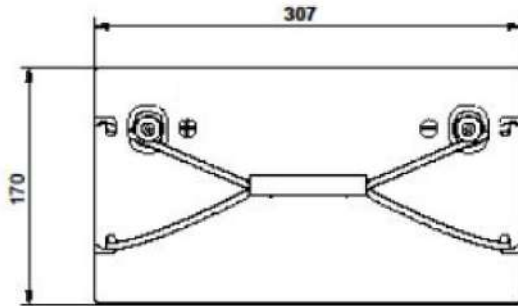


Central Article Code: D31005L46-A  
 Local Code: EV640

Created: 26/08/2021  
 Modified: 26/08/2021

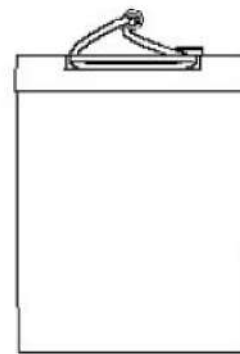

Final Outlook	D3146-A
Approval date	01/12/2021

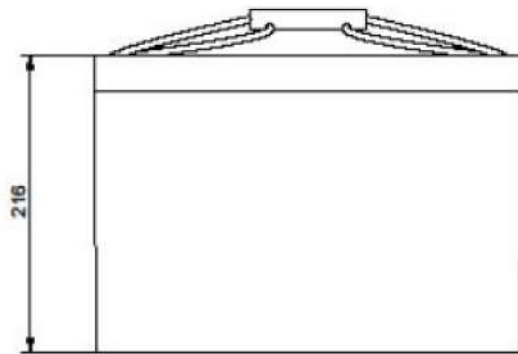

## PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	50.0      03 h
Cranking (A):	0      3s @ 25° test
Charge:	CHARGED
Technology:	Li-ion
Grid:	LiFePO4
Vibration:	3 axis acc. UN38.3 req.
Endurance:	4000c at 80% DoD

## CONTAINER

Type:	D31      BLACK
Hold Down:	B0
H.D. Adapter:	No

## COVER

Type:	Flat/Press      BLACK
Polarity:	ETN 0
Terminals:	M08
Terminal Adapter:	No
SOCI:	No
Ventilation:	Central
Filter:	No
Lateral Plug:	No

## STD. DIMENSIONS

Length (mm ± 2):	306
Width (mm ± 2):	173
Height (mm ± 2):	222
Total Weight (kg ± 5%):	6.50

## PLUGS

Type:	1 x Not defined      BLACK
-------	----------------------------

## HANDLES

Type:	1 x Rope (Rigid holder)      BLACK
-------	------------------------------------

## OTHERS

Degassing Tube:	No
-----------------	----

TB-BL1250F S110A

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.