


Central Article Code: U01018G01-A
 Local Code: GEL12-30

Created: 07/09/2005
 Modified: 03/05/2018

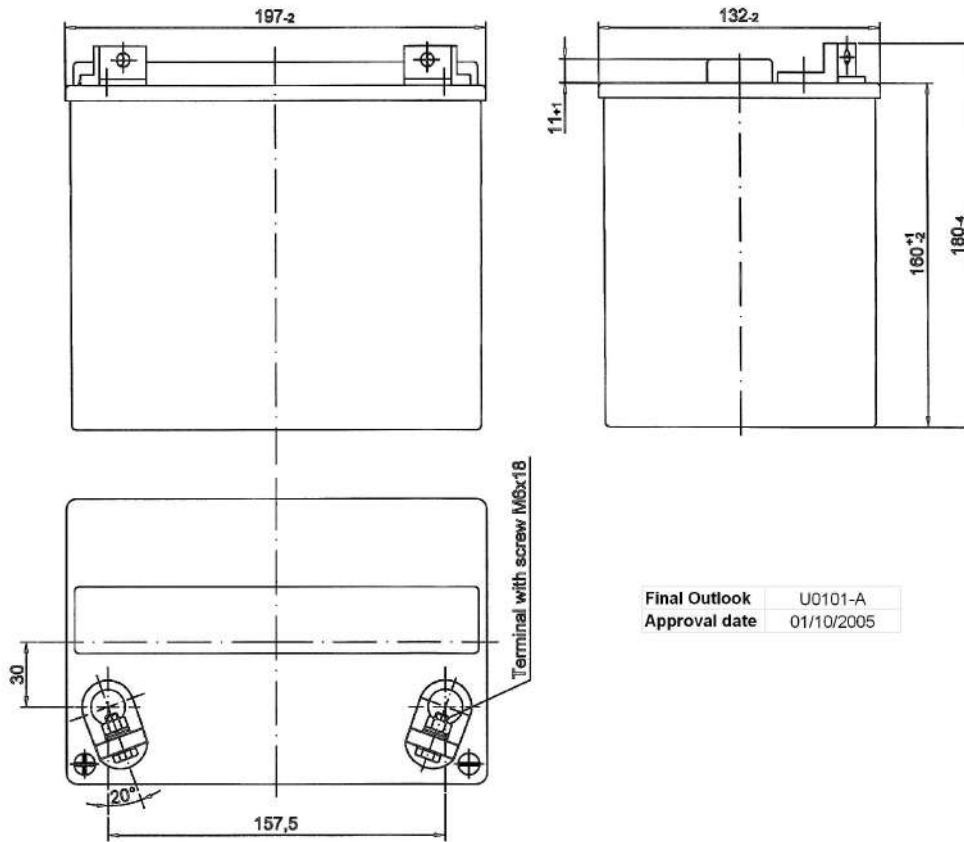

Final Outlook	U0101-A
Approval date	01/10/2005

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	30.0 20 h
Cranking (A):	180 EN
Charge:	CHARGED
Technology:	GEL
Grid:	Ca/Ca
Vibration:	V3 (30Hz+/-2Hz/6g/20h)
Endurance:	250 cycles@100%

STD. DIMENSIONS

Length (mm ± 2):	197
Width (mm ± 2):	132
Height (mm ± 2):	186
Total Weight (kg ± 5%):	11.10

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	U01	GREY MEDIUM
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Screw	GREY MEDIUM
Polarity:	ETN 1	
Terminals:	EN full Ford lug	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Independent	
Filter:	No	
Lateral Plug:	No	

PLUGS

Type:	6 x Valve+Cover	GREY MEDIUM
-------	-----------------	-------------

HANDLES

Type:	None
-------	------

OTHERS

Degassing Tube:	No
-----------------	----