


CUSTOMER DATASHEET


Printed: 14/02/2022

Product Management
Transportation Europe

Central Article Code: C69037D01-A Created: 04/10/2007

Local Code: U1R-11 Modified: 15/12/2020

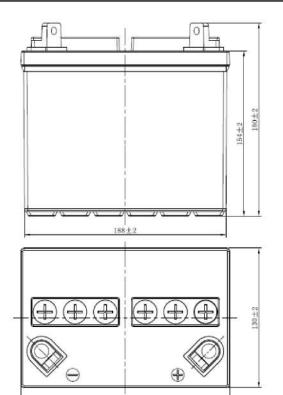



Final Outlook C6901-A Approval date 01/09/2010

PERFORMANCES			CONTAINER		
Voltage (V):	12 V		Type:	C69	WHITE
C20 (Ah):	30.0	10 h	Hold Down:	В0	
Cranking (A):	300	EN	H.D. Adapter:	No	
Charge:	DRY		COVER		
Technology:	Vented/Flooded		Type:	Motorbike	e (independ BLACK
Grid:	Low Sb		Polarity:	ETN 0	
Vibration:	Not Defined		Terminals:	M11	
Endurance:	Not Defined		Terminal Adapte	er: No	
	Not Bonnod		SOCI:	No	
			Ventilation:	Independ	ent
STD. DIMENSIONS			Filter:	No	
Length (mm ± 2):	195		Lateral Plug:	No	
Vidth (mm ± 2): 130		PLUGS			
Height (mm ± 2):	180		Type: 6 x Mot	o Plug	RED
Total Weight (kg ± 5%):	9.20			HANDLES	
			Type: None		
			OTHERS		
This is a dry battery supplied with bottles of sulphuric acid. Sale of acid to end users is forbidden by Eu.Reg.1148/2019. Dry batteries must be filled with acid before delivery to end users			Degassing Tub	e: No	
All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.					