


Central Article Code: LB3070C11-C
 Local Code: TA722

Created: 24/02/2020
 Modified: 22/01/2021

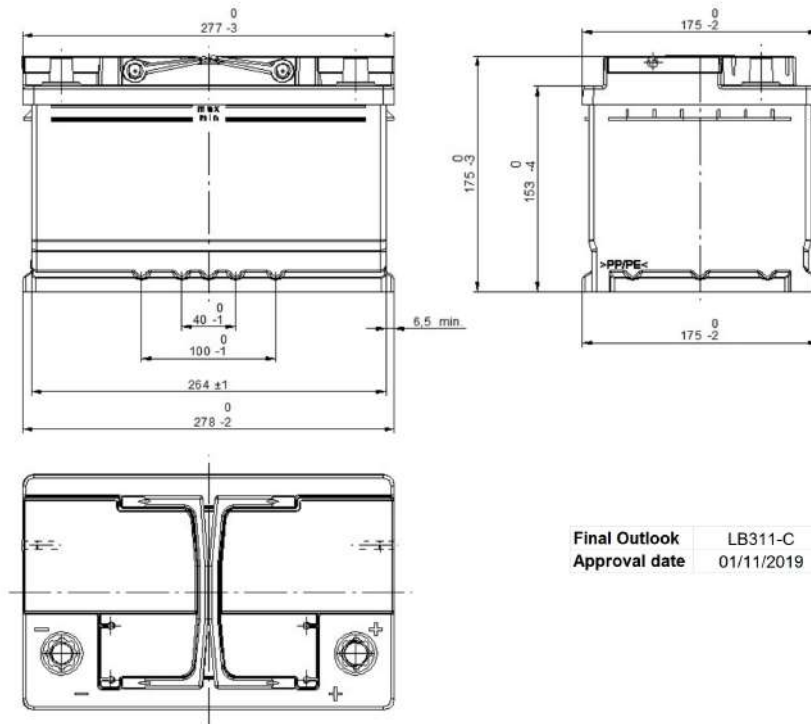

| PERFORMANCES | | CONTAINER | | | |
|---|-----------------------|-------------------|---------------------------------|-----------|-------|
| Voltage (V): | 12 V | Type: | LB3 | BLACK | |
| C20 (Ah): | 72.0 20 h | Hold Down: | B13 | | |
| Cranking (A): | 720 EN | H.D. Adapter: | No | | |
| Charge: | WET | COVER | | | |
| Technology: | Vented/Flooded | Type: | Double with Integrat BLACK | | |
| Grid: | Ca/Ca | Polarity: | ETN 0 | | |
| Vibration: | V1 (30Hz+/-2Hz/3g/2h) | Terminals: | EN taper post | | |
| Endurance: | E2 (90 cycles@50%) | Terminal Adapter: | No | | |
| STD. DIMENSIONS | | SOCI: | No | | |
| | | Ventilation: | Central | | |
| | | Filter: | 2 Filters | | |
| | | Lateral Plug: | Standard | Left side | BLACK |
| Length (mm ± 2): | 278 | PLUGS | | | |
| Width (mm ± 2): | 175 | Type: | 1 x Vent Sealed PSL-OE ha BLACK | | |
| Height (mm ± 2): | 175 | HANDLES | | | |
| Total Weight (kg ± 5%): | 15.80 | Type: | 2 x PSL OE Integrated BLACK | | |
| All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations. | | OTHERS | | | |
| | | Degassing Tube: | No | | |