


CUSTOMER DATASHEET

Printed: 11/02/2022

Product Management
Transportation Europe

Central Article Code: LB4080C10-C Created: 24/02/2020

Local Code: TA852 Modified: 22/01/2021

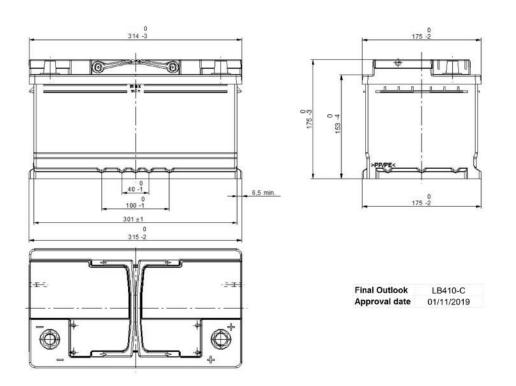

PERFORMANCES				CONTAINER		
Voltage (V):	12 V		Type:	LB4	BLACK	
C20 (Ah):	85.0	20 h	Hold Down:	B13		
Cranking (A):	800	EN	H.D. Adapter:	No		
Charge:	WET		COVER			
Technology:	Vented/Floode	Vented/Flooded		Double with Integrat BLACK		
Grid:	Ca/Ca		Polarity:	ETN 0		
Vibration:	V1 (30Hz+/-2H	V1 (30Hz+/-2Hz/3g/2h)		EN taper post		
Endurance:	•	E2 (90 cycles@50%)		No		
	22 (00 0) 0100 (20070)	SOCI:	No		
			Ventilation:	Central		
STD. DIMENSIONS			Filter:	2 Filters		
Length (mm ± 2):	315		Lateral Plug:	Standard shape	Left side BLACK	
Width (mm ± 2):	175			PLUGS		
Height (mm ± 2):	175		Type: 1 x Vent S	Type: 1 x Vent Sealed PSL-OE ha BLACK		
Total Weight (kg ± 5%): 18.50		HANDLES			
			Type: 2 x PSL OE Integrated BLACK			
				OTHERS		
			Degassing Tube:	No		
All figures show nominal v and applicable European I	ralues. Tolerances are acco Regulations.	ording to EN50342				