


Central Article Code: B24033C23-A



Created: 17/06/2014

Local Code: TB454

Modified: 01/06/2020

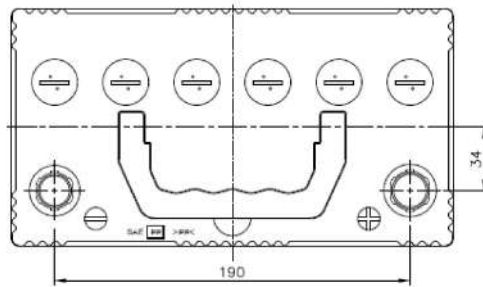

|               |            |
|---------------|------------|
| Final Outlook | B2423-A    |
| Approval date | 15/03/2019 |

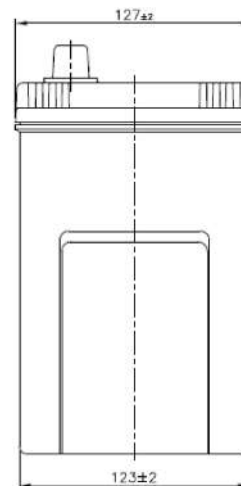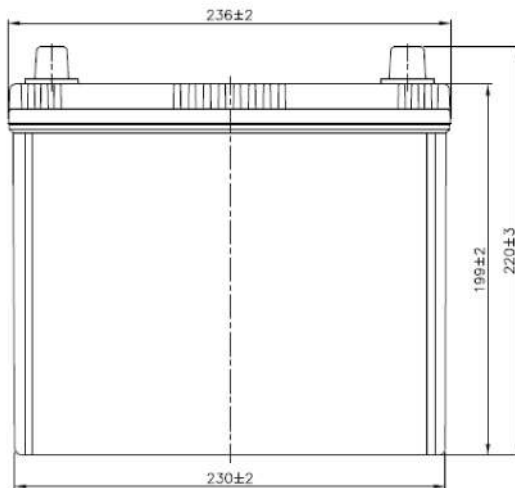

## PERFORMANCES

|               |                       |
|---------------|-----------------------|
| Voltage (V):  | 12 V                  |
| C20 (Ah):     | 45.0      20 h        |
| Cranking (A): | 330      EN           |
| Charge:       | WET                   |
| Technology:   | Vented/Flooded        |
| Grid:         | Ca/Ca                 |
| Vibration:    | V1 (30Hz+/-2Hz/3g/2h) |
| Endurance:    | E1 (180 cycles@25%)   |

## CONTAINER

|               |     |       |
|---------------|-----|-------|
| Type:         | B24 | BLACK |
| Hold Down:    | B0  |       |
| H.D. Adapter: | No  |       |

## COVER

|                   |                      |       |
|-------------------|----------------------|-------|
| Type:             | Flat/Screw Integrate | BLACK |
| Polarity:         | ETN 0                |       |
| Terminals:        | EN taper post        |       |
| Terminal Adapter: | No                   |       |
| SOCI:             | No                   |       |
| Ventilation:      | Independent          |       |
| Filter:           | No                   |       |
| Lateral Plug:     | No                   |       |

## STD. DIMENSIONS

|                         |       |
|-------------------------|-------|
| Length (mm ± 2):        | 237   |
| Width (mm ± 2):         | 127   |
| Height (mm ± 2):        | 227   |
| Total Weight (kg ± 5%): | 11.40 |

## PLUGS

|       |         |       |
|-------|---------|-------|
| Type: | 6 x M18 | BLACK |
|-------|---------|-------|

## HANDLES

|       |                |       |
|-------|----------------|-------|
| Type: | 1 x Integrated | BLACK |
|-------|----------------|-------|

## OTHERS

|                 |    |
|-----------------|----|
| Degassing Tube: | No |
|-----------------|----|

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.