

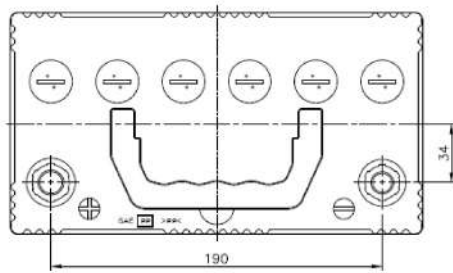


Central Article Code: B24033C22-A
 Local Code: TB457

Created: 17/06/2014
 Modified: 01/06/2020

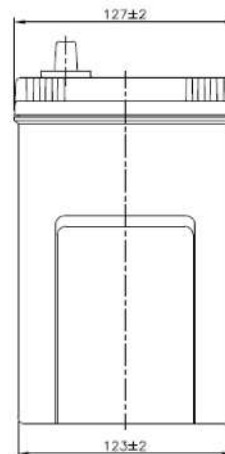

Final Outlook	B2422-A
Approval date	15/03/2019

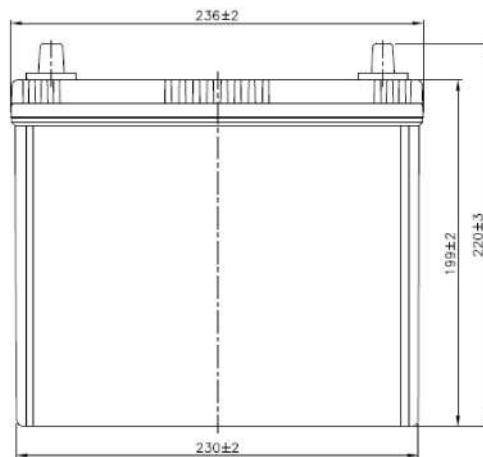

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	45.0	20 h
Cranking (A):	330	EN
Charge:	WET	
Technology:	Vented/Flooded	
Grid:	Ca/Ca	
Vibration:	V1 (30Hz+/-2Hz/3g/2h)	
Endurance:	E1 (180 cycles@25%)	

CONTAINER

Type:	B24	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Screw Integrate	BLACK
Polarity:	ETN 1	
Terminals:	JIS taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Independent	
Filter:	No	
Lateral Plug:	No	

STD. DIMENSIONS

Length (mm ± 2):	237
Width (mm ± 2):	127
Height (mm ± 2):	227
Total Weight (kg ± 5%):	11.30

PLUGS

Type:	6 x M18	BLACK
-------	---------	-------

HANDLES

Type:	1 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	No
-----------------	----

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.