


Central Article Code: D20036C12-A

Created: 10/05/2018

Local Code: TB504

Modified: 15/06/2018

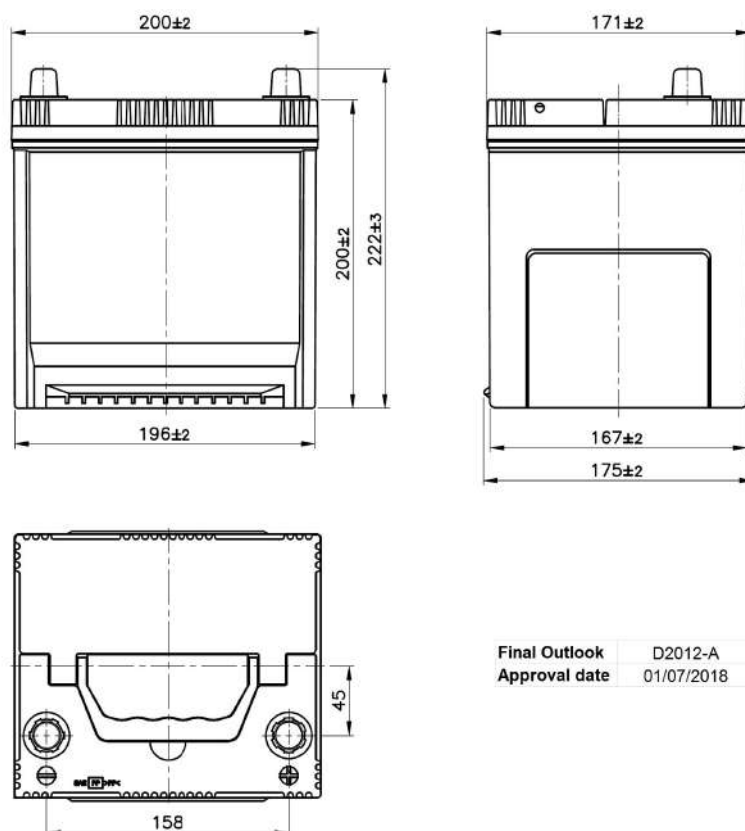

Final Outlook	D2012-A
Approval date	01/07/2018

## PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	50.0 20 h
Cranking (A):	360 EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca
Vibration:	V1 (30Hz+/-2Hz/3g/2h)
Endurance:	E1 (180 cycles@25%)

## STD. DIMENSIONS

Length (mm ± 2):	200
Width (mm ± 2):	173
Height (mm ± 2):	222
Total Weight (kg ± 5%):	13.00

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

## CONTAINER

Type:	D20 BLACK
Hold Down:	Korean B1
H.D. Adapter:	No

## COVER

Type:	Double with Integrat BLACK
Polarity:	ETN 0
Terminals:	EN taper post
Terminal Adapter:	No
SOCI:	No
Ventilation:	Central
Filter:	2 Filters
Lateral Plug:	No

## PLUGS

Type:	1 x Vent Sealed (JIS) BLACK
-------	-----------------------------

## HANDLES

Type:	1 x Integrated BLACK
-------	----------------------

## OTHERS

Degassing Tube:	No
-----------------	----