


CUSTOMER DATASHEET

Printed: 11/02/2022

Product Management
Transportation Europe

Central Article Code: D26054C42-A Created: 10/05/2018

Local Code: TB704 Modified: 08/09/2021

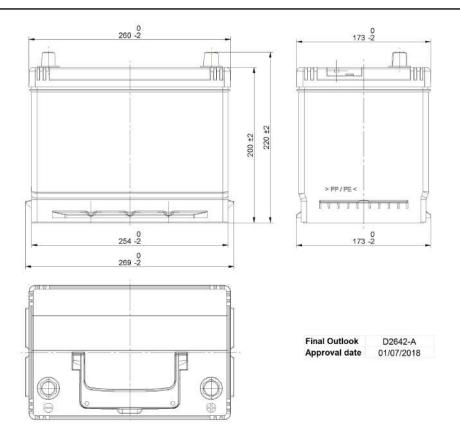

PERFORMANCES			CONTAINER				
Voltage (V):	12 V	Т	Гуре:		D26	BLACK	
C20 (Ah):	70.0 20 h	F	Hold Do	own:	Korean B1+B6	3	
Cranking (A):	540 EN	F	H.D. Ac	lapter:	No		
Charge:	WET		COVER				
Technology:	Vented/Flooded	T	Type:		Flat/Press integrated BLACK		
Grid:	Ca/Ca	P	Polarity:		ETN 0		
Vibration:	V1 (30Hz+/-2Hz/3g/2	h) T	Terminals: Terminal Adapter:		EN taper post No		
Endurance:	E1 (180 cycles@25%)	· I +					
	L1 (100 0)0103@207	s	SOCI:		No		
		V	/entilati	on:	Central		
STD. DIMENSIONS			Filter: 1 Filter at Right				
Length (mm ± 2):	270	L	ateral	Plug:	No		
Width (mm ± 2):	dth (mm ± 2): 173			PLUGS			
Height (mm ± 2):			Type: 1 x VCL Vent		ent	BLACK	
Total Weight (kg ± 59): 16.10		HANDLES				
		Т	ype:	1 x Integra	ited	BLACK	
			OTHERS				
				Degassing Tube: No			
All figures show nominal vand applicable European	ralues. Tolerances are according to Regulations.	EN50342					