


CUSTOMER DATASHEET


Printed: 11/02/2022

Product Management
Transportation Europe

Central Article Code: L04066C11-C Created: 10/05/2018

Local Code: TB800 Modified: 31/07/2020

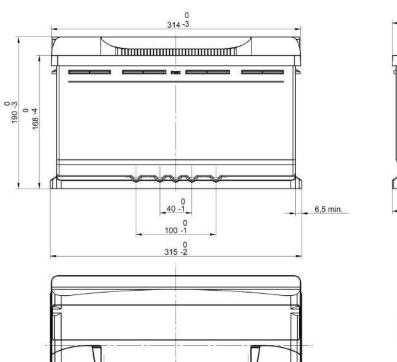



Final Outlook	L0411-C
Approval date	01/07/2018
approvar date	0110112010

D			\frown		N/	Λ	N	C		c
	ĸ	Г,	u	ĸ	IVI	А	IN	ı	⊏.	3

Voltage (V): 12 V

C20 (Ah): 80.0 20 h Cranking (A): 640 EN

Charge: WET

Technology: Vented/Flooded

Grid: Ca/Ca

 Vibration:
 V1 (30Hz+/-2Hz/3g/2h)

 Endurance:
 E1 (180 cycles@25%)

STD. DIMENSIONS

Length (mm ± 2): 315

Width (mm \pm 2): 175 Height (mm \pm 2): 190 Total Weight (kg \pm 5%): 19.00

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

Type:	L04	BLACK

Hold Down: B13
H.D. Adapter: No

COVER

CONTAINER

Type: NPR BLACK

Polarity: ETN 0

Terminals: EN taper post

Terminal Adapter: No
SOCI: No
Ventilation: Central
Filter: 2 Filters

Lateral Plug: Standard Right side BLACK

shape

PLUGS

Type: 1 x NPR (Manifold) BLACK

HANDLES

Type: 1 x NPR (Standard) BLACK

OTHERS

Degassing Tube: No