

CUSTOMER DATASHEET

Printed:

11/02/2022

Product Management

Transportation Europe

Central Article Code:

D02072C05-A

Created:


30/10/2018

Local Code:

TG1102

Modified:

31/07/2020

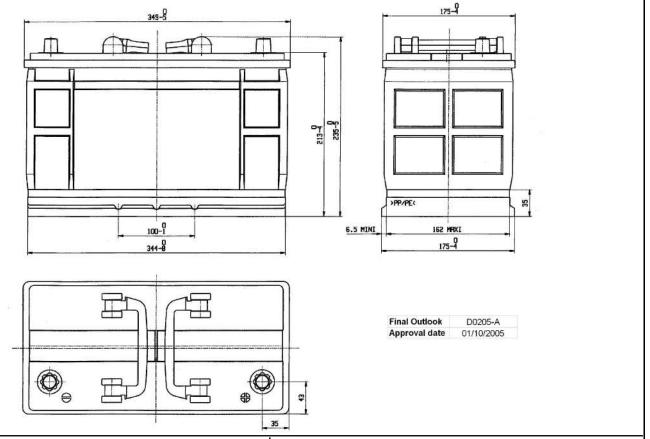

ÞΕ	D		n	D	N/	Λ	N	\mathbf{c}		9
 _	. 「	г,	u	Г	IVI	м	IV	u	С,	О.

Voltage (V):

12 V

C20 (Ah):

110.0 720

20 h ΕN

Cranking (A):

WET

Technology:

Charge:

Vented/Flooded

Grid:

Ca/Ca

Vibration:

V2 (30Hz+/-2Hz/6g/2h)

Endurance:

E2 (90 cycles@50%)

STD. DIMENSIONS

Length (mm ± 2):

349

Width $(mm \pm 2)$:

175

Height (mm ± 2):

235

Total Weight (kg ± 5%):

25.40

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Hold Down:

В1

D02

H.D. Adapter:

Type:

Type:

Polarity:

No

COVER

Flat/Press

Terminals:

ETN 0

EN taper post

Terminal Adapter:

SOCI:

Ventilation:

Independent

Filter:

No

Lateral Plug:

PLUGS

2 x Vent Type:

BLACK

BLACK

BLACK

HANDLES

2 x Rigid Type:

BLACK

OTHERS

Degassing Tube:

No