


CUSTOMER DATASHEET


Printed: 11/02/2022


Product Management Transportation Europe

D08068C01-A Created: 16/10/2012 Central Article Code:

31/07/2020 Local Code: TG1206 Modified:

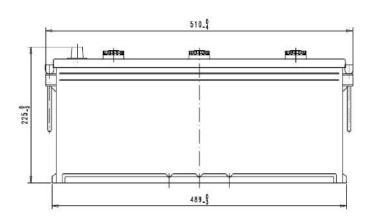





Final Outlook D0801-A Approval date 15/05/2010

PERFORMANCES		CONTAINER		
Voltage (V): C20 (Ah): Cranking (A):	12 V 120.0 20 h 680 EN	Type: Hold Down: H.D. Adapter:	D08 B3 No	BLACK
Charge:	WET	COVER		
Technology:	Vented/Flooded	Type:	Flat/Screw	BLACK
Grid:	Ca/Ca	Polarity:	ETN 4	
Vibration:	V2 (30Hz+/-2Hz/6g/2h)	Terminals:	EN taper post	
Endurance:	E2 (90 cycles@50%)	Terminal Adapter: SOCI:	No No	

Ventilation:

Filter:

STD. DIMENSIONS 510 175

Lateral Plug: 6 x M27 Type:

Length (mm ± 2): Width (mm ± 2): Height (mm ± 2): 225 Total Weight (kg ± 5%): 31.80

HANDLES 2 x Rope (Rigid holder) BLACK Type:

No

PLUGS

BLACK

Independent

No

No

OTHERS

Degassing Tube:

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by EXIDE Technologies.