


CUSTOMER DATASHEET


Printed: 11/02/2022


Product Management
Transportation Europe

Central Article Code: ATM090C01-A Created: 04/08/2005

Local Code: TG1402 Modified: 03/05/2018

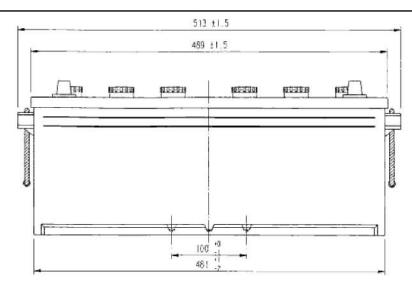



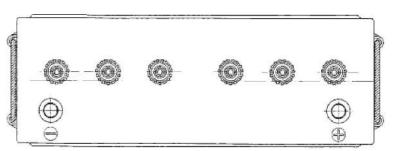

Final Outlook ATM01-A Approval date 01/10/2005

	D		\frown	D	N/	ΙΑ	NI			c
 ▝⊏	К	г,	u	К	IV	м	IV	u	⊏,	o

Voltage (V): 12 V

C20 (Ah): 140.0 20 h Cranking (A): 900 EN

Charge: WET

Technology: Vented/Flooded

Grid: Ca/Ca

Vibration: V2 (30Hz+/-2Hz/6g/2h)

Endurance: E2 (90 cycles@50%)

CONTAINER

Type: ATM BLACK

Hold Down: B1 H.D. Adapter: No

COVER

Type: Flat/Screw BLACK

Polarity: ETN 0

Terminals: EN taper post

Terminal Adapter: No SOCI: No

Ventilation: Independent

Filter: No Lateral Plug: No

STD. DIMENSIONS

33.80

Length (mm ± 2): 508
Width (mm ± 2): 175
Height (mm ± 2): 205

Total Weight (kg ± 5%):

PLUGS

Type: 6 x M27 BLACK

HANDLES

Type: 2 x Rope (Rigid holder) BLACK

OTHERS

Degassing Tube: No

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by EXIDE Technologies.