


Central Article Code: C76008A03-A

Created: 16/06/2011

Local Code: TK143

Modified: 14/03/2019

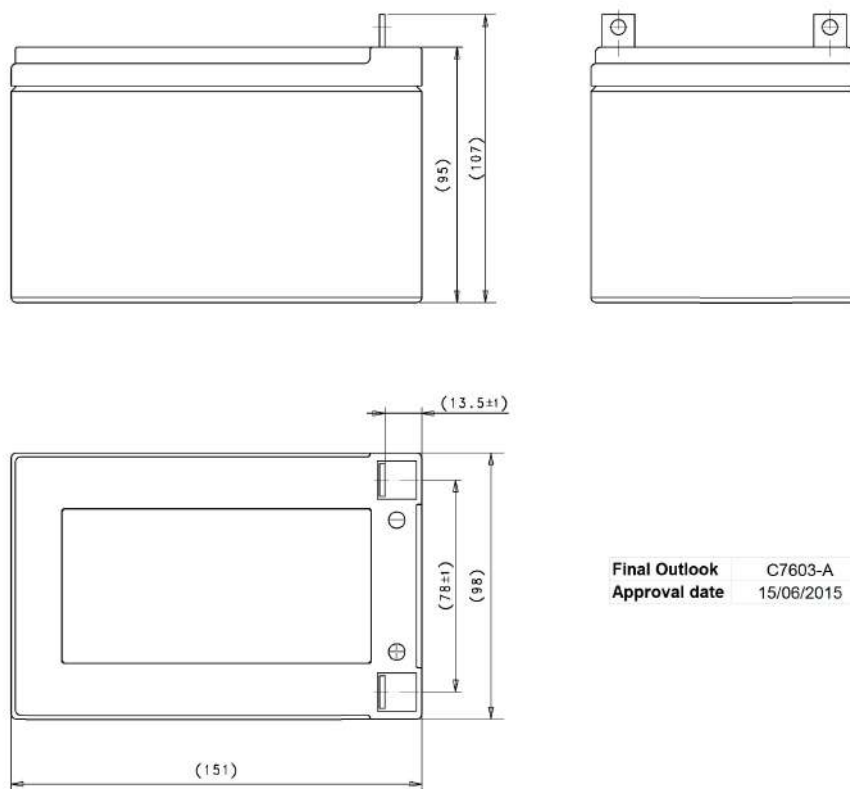

Final Outlook	C7603-A
Approval date	15/06/2015

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	14.0	20 h
Cranking (A):	80	Not applicable
Charge:	CHARGED	
Technology:	AGM	
Grid:	Ca/Ca	
Vibration:	V3 (30Hz+/-2Hz/6g/20h)	
Endurance:	300 cycles@75%	

STD. DIMENSIONS

Length (mm ± 2):	150
Width (mm ± 2):	100
Height (mm ± 2):	100
Total Weight (kg ± 5%):	4.20

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	C76	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Screw	BLACK
Polarity:	ETN 3	
Terminals:	Screwed/Lug	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Independent	
Filter:	No	
Lateral Plug:	No	

PLUGS

Type:	6 x Valve+Cover	BLACK
-------	-----------------	-------

HANDLES

Type:	None
-------	------

OTHERS

Degassing Tube:	No
-----------------	----