



## Yuasa Scheda Tecnica

### Yuasa HJ-S46B24L(S)

#### Prestazione

|                            |      |
|----------------------------|------|
| Tensione                   | 12V  |
| Capacità (20 ore)          | 45Ah |
| Corrente di spunto A (EN1) | 325A |

#### Dimensioni

|            |       |
|------------|-------|
| Lunghezza  | 238mm |
| Profondità | 126mm |
| Altezza    | 227mm |

#### Pesi e Misure

|                      |        |
|----------------------|--------|
| Peso medio con acido | 12.7kg |
|----------------------|--------|



#### Caratteristiche del Monoblocco

|                               |             |
|-------------------------------|-------------|
| Tipo di monoblocco            | B24 JIS AGM |
| Schema polarità               | 1           |
| Fissaggi alla base            | N           |
| Maniglie                      | ✓           |
| Applicazioni da semi trazione | ✓           |
| Tipo di coperchio             | VRLA        |


#### Tecnologia

|                                 |                  |
|---------------------------------|------------------|
| Pastiglia antideflagrante       | ✓                |
| Tecnologia                      | Ca/Ca VRLA       |
| Separatore                      | AGM              |
| Vibrazioni                      | V1 (30Hz/3g/2hr) |
| Corrente di carica raccomandata | 3A               |
| Performance Marking             | W5-C2-V2-E2      |

#### Tipologia dei terminali

##### T1


Standard DIN Post

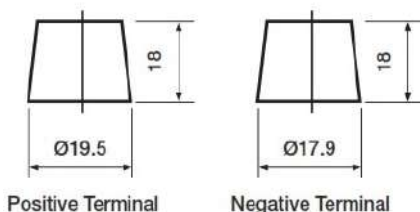

Positive Terminal

Negative Terminal

#### Schema di Collegamento

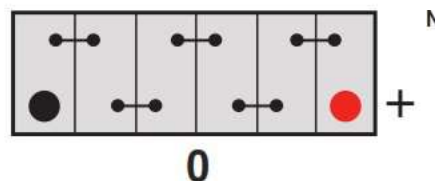

#### Fissaggio batteria



Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa HJ-S46B24L(S)

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 45Ah |
| Cold Cranking Amps (EN1) | 325A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 238mm |
| Width  | 126mm |
| Height | 227mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 12.7kg |
|-----------------------|--------|



#### Container Features

|                        |             |
|------------------------|-------------|
| Case Type              | B24 JIS AGM |
| Cell Layout            | 1           |
| Hold Down              | N           |
| Handles                | ✓           |
| Semi-Traction Features | ✓           |
| Lid Type               | VRLA        |


#### Technology

|                           |                  |
|---------------------------|------------------|
| Flame Arrestor Technology | ✓                |
| Separator                 | Ca/Ca VRLA AGM   |
| Vibration                 | V1 (30Hz/3g/2hr) |
| Recommended Charge Rate   | 3A               |
| Performance Marking       | W5-C2-V2-E2      |

#### Terminal Type

##### T1


Standard DIN Post

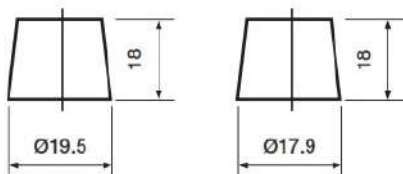


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

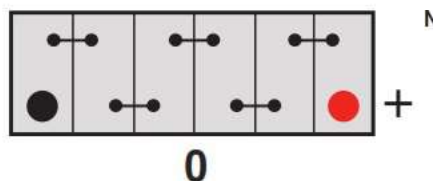

#### Battery Hold-down



Data Sheet generated on 11/06/2022 - E&OE