



Yuasa Scheda Tecnica

Yuasa L35-100 - Batterie per tempo libero

Prestazione

| | |
|----------------------------|-------|
| Tensione | 12V |
| Capacità (20 ore) | 100Ah |
| Corrente di spunto A (EN1) | 720A |

Dimensioni

| | |
|------------|-------|
| Lunghezza | 350mm |
| Profondità | 174mm |
| Altezza | 224mm |

Pesi e Misure

| | |
|----------------------|---------|
| Peso medio con acido | 24.7kg |
| Volume dell'acido | 5 Litri |



Caratteristiche del Monoblocco

| | |
|----------------------------------|---------------------------|
| Tipo di monoblocco | Euro Compact Low Kamina |
| Schema polarità | 1 |
| Fissaggi alla base | N |
| Indicatore dello stato di carica | ✓ |
| Maniglie | ✓ |
| Circuito di sfiato | ✓ |
| Tipo di coperchio | Valvola di fiato centrale |

Tecnologia

| | |
|---------------------------------|-------|
| Pastiglia antideflagrante | ✓ |
| Tecnologia | Ca/Ca |
| Separatore | PE |
| Corrente di carica raccomandata | 5A |


Tipologia dei terminali

Schema di Collegamento


Fissaggio batteria

T1




Standard DIN Post



Positive Terminal



Negative Terminal

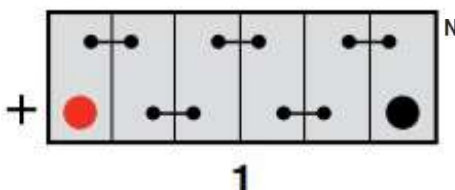

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa L35-100 - Leisure Batteries

Performance

| | |
|--------------------------|-------|
| Voltage | 12V |
| Capacity (20-hour) | 100Ah |
| Cold Cranking Amps (EN1) | 720A |

Dimensions

| | |
|--------|-------|
| Length | 350mm |
| Width | 174mm |
| Height | 224mm |

Weights & Measures

| | |
|-----------------------|----------|
| Mean Weight with Acid | 24.7kg |
| Acid Volume | 5 litres |



Container Features

| | |
|---------------------------|-------------------------|
| Case Type | Euro Compact Low Kamina |
| Cell Layout | 1 |
| Hold Down | N |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | Central Venting |


Technology

| | |
|-------------------------|-------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| Recommended Charge Rate | 5A |


Terminal Type

T1


Standard DIN Post

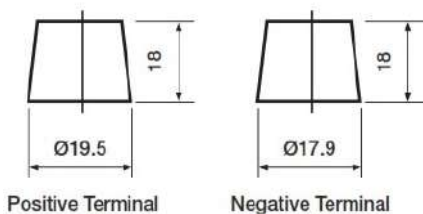

Cell Assembly Layout

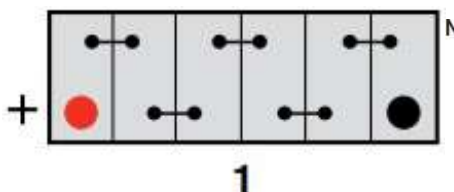

Battery Hold-down



Data Sheet generated on 07/09/2021 - E&OE