



## Yuasa Scheda Tecnica

### Yuasa YBX1072 - Batterie YBX1000 CaCa

#### Prestazione

|                            |      |
|----------------------------|------|
| Tensione                   | 12V  |
| Capacità (20 ore)          | 72Ah |
| Corrente di spunto A (EN1) | 600A |

#### Dimensioni

|            |       |
|------------|-------|
| Lunghezza  | 265mm |
| Profondità | 175mm |
| Altezza    | 205mm |

#### Pesi e Misure

|                      |           |
|----------------------|-----------|
| Peso medio con acido | 18.8kg    |
| Volume dell'acido    | 4.4 Litri |



#### Caratteristiche del Monoblocco

|                    |                           |
|--------------------|---------------------------|
| Tipo di monoblocco | D26 T-Lid (Volvo)         |
| Schema polarità    | 1                         |
| Fissaggi alla base | N                         |
| Maniglie           | ✓                         |
| Circuito di sfiato | ✓                         |
| Tipo di coperchio  | Valvola di fiato centrale |

#### Tecnologia

|                                 |             |
|---------------------------------|-------------|
| Pastiglia antideflagrante       | ✓           |
| Tecnologia                      | Ca/Ca       |
| Separatore                      | PE          |
| Corrente di carica raccomandata | 4A          |
| Performance Marking             | W3-C2-V2-E1 |


#### Tipologia dei terminali

#### Schema di Collegamento


#### Fissaggio batteria

#### T1




Standard DIN Post



Positive Terminal



Negative Terminal

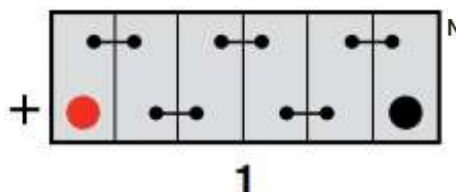

Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX1072 - YBX1000 CaCa Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 72Ah |
| Cold Cranking Amps (EN1) | 600A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 265mm |
| Width  | 175mm |
| Height | 205mm |

#### Weights & Measures

|                       |            |
|-----------------------|------------|
| Mean Weight with Acid | 18.8kg     |
| Acid Volume           | 4.4 litres |



#### Container Features

|             |                   |
|-------------|-------------------|
| Case Type   | D26 T-Lid (Volvo) |
| Cell Layout | 1                 |
| Hold Down   | N                 |
| Handles     | ✓                 |
| End Venting | ✓                 |
| Lid Type    | Central Venting   |


#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Separator               | PE          |
| Recommended Charge Rate | 4A          |
| Performance Marking     | W3-C2-V2-E1 |


#### Terminal Type

##### T1

Standard DIN Post

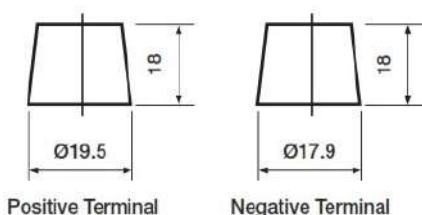

#### Cell Assembly Layout

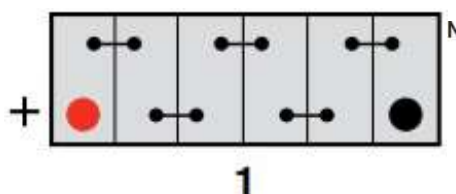

#### Battery Hold-down



Data Sheet generated on 07/09/2021 - E&OE