



Yuasa Scheda Tecnica

Yuasa YBX3004 - Batterie YBX3000 SMF

Prestazione

Tensione	12V
Capacità (20 ore)	50Ah
Corrente di spunto A (EN1)	400A

Dimensioni

Lunghezza	202mm
Profondità	173mm
Altezza	225mm

Pesi e Misure

Peso medio con acido	12.9kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	JIS D20
Schema polarità	1
Fissaggi alla base	N
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	3A
Performance Marking	W4-C2-V3-E1


Tipologia dei terminali

Schema di Collegamento


Fissaggio batteria

T1




Standard DIN Post



Positive Terminal



Negative Terminal

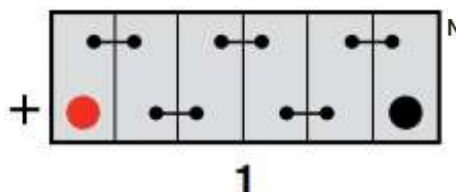

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX3004 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	50Ah
Cold Cranking Amps (EN1)	400A

Dimensions

Length	202mm
Width	173mm
Height	225mm

Weights & Measures

Mean Weight with Acid	12.9kg
-----------------------	--------



Container Features

Case Type	JIS D20
Cell Layout	1
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca PE
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W4-C2-V3-E1


Terminal Type

T1

Standard DIN Post

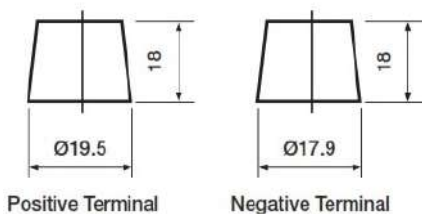

Cell Assembly Layout

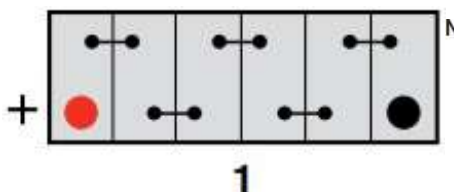

Battery Hold-down



Data Sheet generated on 07/09/2021 - E&OE