



Yuasa Scheda Tecnica

Yuasa YBX5056 - Batterie YBX5000 Silver High Performance SMF

Prestazione

Tensione	12V
Capacità (20 ore)	40Ah
Corrente di spunto A (EN1)	360A

Dimensioni

Lunghezza	187mm
Profondità	137mm
Altezza	225mm

Pesi e Misure

Peso medio con acido	9.4kg
----------------------	-------



Caratteristiche del Monoblocco

Tipo di monoblocco	JIS B19 + B1
Fissaggi alla base	B1
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF


Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	3A
Performance Marking	W4-C2-V3-E1


Tipologia dei terminali

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Schema di Collegamento

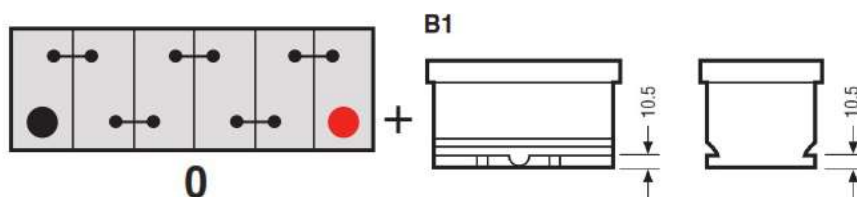

Fissaggio batteria

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX5056 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	360A

Dimensions

Length	187mm
Width	137mm
Height	225mm

Weights & Measures

Mean Weight with Acid	9.4kg
-----------------------	-------



Container Features

Case Type	JIS B19 + B1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W4-C2-V3-E1


Terminal Type

T1/T3


Standard DIN Post




Remove T1 adapter for T3



Cell Assembly Layout

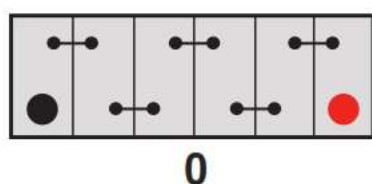

B1

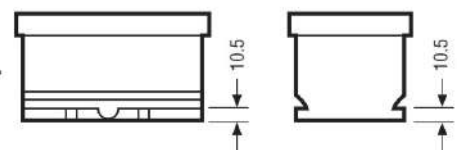

Battery Hold-down

Data Sheet generated on 07/09/2021 - E&OE