



Yuasa Scheda Tecnica

Yuasa YBX5057 - Batterie YBX5000 Silver High Performance SMF

Prestazione

Tensione	12V
Capacità (20 ore)	50Ah
Corrente di spunto A (EN1)	450A

Dimensioni

Lunghezza	238mm
Profondità	129mm
Altezza	223mm

Pesi e Misure

Peso medio con acido	12.4kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	B24 JIS
Schema polarità	1
Fissaggi alla base	N
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF


Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	3A
Performance Marking	W4-C2-V3-E1


Tipologia dei terminali

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Schema di Collegamento

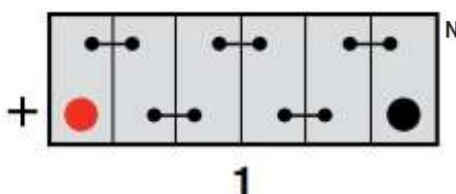

Fissaggio batteria



Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX5057 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	50Ah
Cold Cranking Amps (EN1)	450A

Dimensions

Length	238mm
Width	129mm
Height	223mm

Weights & Measures

Mean Weight with Acid	12.4kg
-----------------------	--------



Container Features

Case Type	B24 JIS
Cell Layout	1
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca PE
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W4-C2-V3-E1


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

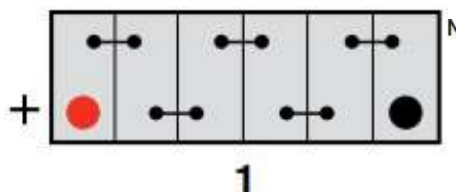

Battery Hold-down



Data Sheet generated on 07/09/2021 - E&OE