



Yuasa Scheda Tecnica

Yuasa YBX5115 - Batterie YBX5000 Silver High Performance SMF

Prestazione

| | |
|----------------------------|------|
| Tensione | 12V |
| Capacità (20 ore) | 90Ah |
| Corrente di spunto A (EN1) | 800A |

Dimensioni

| | |
|------------|-------|
| Lunghezza | 317mm |
| Profondità | 175mm |
| Altezza | 190mm |

Pesi e Misure

| | |
|----------------------|--------|
| Peso medio con acido | 20.7kg |
|----------------------|--------|



Caratteristiche del Monoblocco

| | |
|----------------------------------|----------------------|
| Tipo di monoblocco | L4 DIN |
| Fissaggi alla base | B3 |
| Indicatore dello stato di carica | ✓ |
| Maniglie | ✓ |
| Circuito di sfiato | ✓ |
| Tipo di coperchio | Doppio Coperchio SMF |

Tecnologia

| | |
|---------------------------------|-------------|
| Pastiglia antideflagrante | ✓ |
| Tecnologia | Ca/Ca |
| Separatore | PE |
| Test antiribaltamento VDA | ✓ |
| Corrente di carica raccomandata | 5A |
| Performance Marking | W4-C2-V3-E1 |


Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria


T1

Standard DIN Post

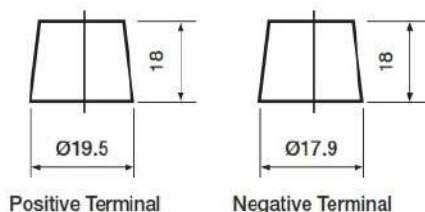

Positive Terminal

Negative Terminal

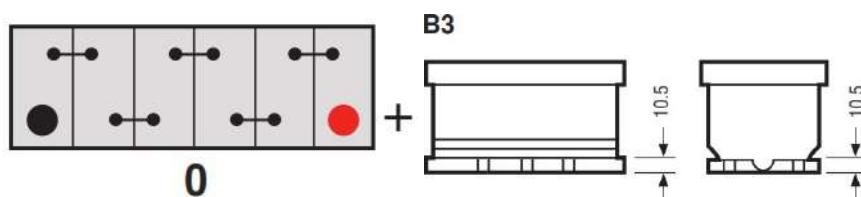

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX5115 - YBX5000 Silver High Performance SMF Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 90Ah |
| Cold Cranking Amps (EN1) | 800A |

Dimensions

| | |
|--------|-------|
| Length | 317mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 20.7kg |
|-----------------------|--------|



Container Features

| | |
|---------------------------|----------------|
| Case Type | L4 DIN |
| Hold Down | B3 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |


Technology

| | |
|-------------------------|-------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 5A |
| Performance Marking | W4-C2-V3-E1 |

Terminal Type

T1


Standard DIN Post

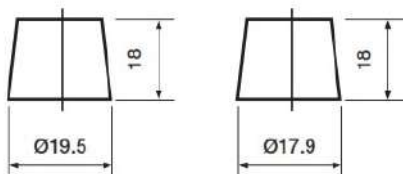

Positive Terminal

Negative Terminal

Cell Assembly Layout

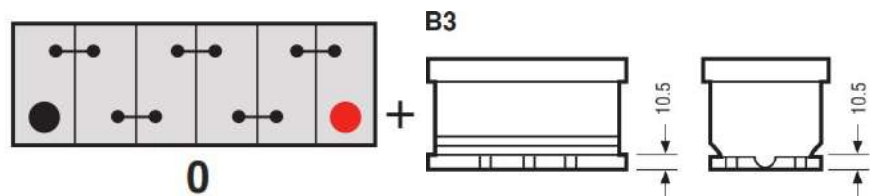

Battery Hold-down

Data Sheet generated on 07/09/2021 - E&OE