



Yuasa Scheda Tecnica

Yuasa YBX5116 - Batterie YBX5000 Silver High Performance SMF

Prestazione

Tensione	12V
Capacità (20 ore)	90Ah
Corrente di spunto A (EN1)	800A

Dimensioni

Lunghezza	315mm
Profondità	175mm
Altezza	190mm

Pesi e Misure

Peso medio con acido	20.7kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	L4 DIN
Schema polarità	1
Fissaggi alla base	B3
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	5A
Performance Marking	W4-C2-V3-E1


Tipologia dei terminali

Schema di Collegamento


Fissaggio batteria

T1


Standard DIN Post



Positive Terminal



Negative Terminal

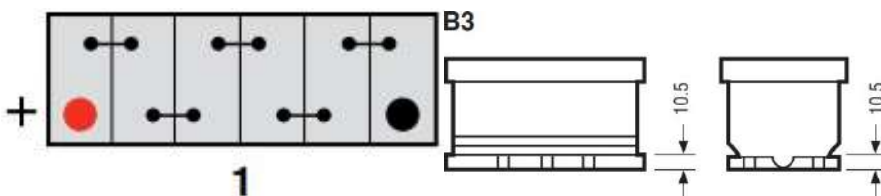

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX5116 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	90Ah
Cold Cranking Amps (EN1)	800A

Dimensions

Length	315mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	20.7kg
-----------------------	--------



Container Features

Case Type	L4 DIN
Cell Layout	1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	5A
	W4-C2-V3-E1


Terminal Type

T1


Standard DIN Post

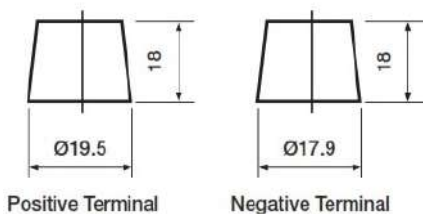

Cell Assembly Layout

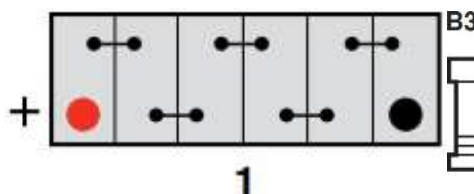

Battery Hold-down

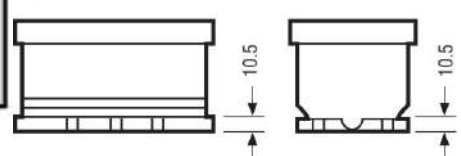

Data Sheet generated on 07/09/2021 - E&OE