# Yuasa Scheda Tecnica

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

## Yuasa YBX5625 - Super Heavy Duty Battery

## Prestazione

| | |
|---|---|
| Tensione | 12V |
| Capacità (20 ore) | 230Ah |
| Corrente di spunto A (EN1) | 1350A |


## Dimensioni

| | |
|---|---|
| Lunghezza | 516mm |
| Profondità | 274mm |
| Altezza | 236mm |

## Pesi e Misure

| | |
|---|---|
| Peso medio con acido | 56.7kg |

## Caratteristiche del Monoblocco

| | |
|---|---|
| Tipo di monoblocco | DIN C |
| Schema polarità | 3 |
| Fissaggi alla base | N |
| Indicatore dello stato di carica | ✔ |
| Maniglie | ✔ |
| Tipo di coperchio | Doppio Coperchio SMF |

## Tecnologia

| | |
|---|---|
| Tecnologia | Ca/Ca |
| Corrente di carica raccomandata | 12A |
| Performance Marking | W3-C2-V4-M1 |

## Tipologia dei terminali

**T1**
Standard DIN Post

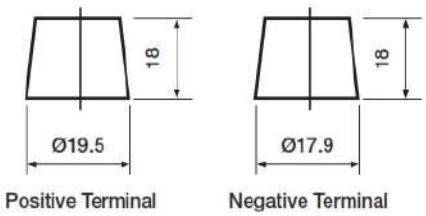


## Schema di Collegamento

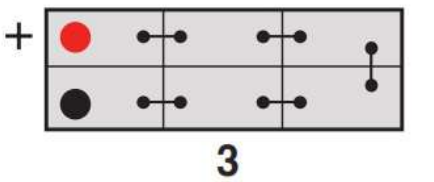


## Fissaggio batteria



Scheda tecnica prodotta su E&OE

# Yuasa Technical Data Sheet

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

## Yuasa YBX5625 - Super Heavy Duty Battery

## Performance

| | |
|---|---|
| Voltage | 12V |
| Capacity (20-hour) | 230Ah |
| Cold Cranking Amps (EN1) | 1350A |


## Dimensions

| | |
|---|---|
| Length | 516mm |
| Width | 274mm |
| Height | 236mm |

## Weights & Measures

| | |
|---|---|
| Mean Weight with Acid | 56.7kg |

## Container Features

| | |
|---|---|
| Case Type | DIN C |
| Cell Layout | 3 |
| Hold Down | N |
| State of Charge Indicator | ✔ |
| Handles | ✔ |
| Lid Type | SMF Double Lid |

## Technology

| | |
|---|---|
| Technology | Ca/Ca |
| Recommended Charge Rate | 12A |
| Performance Marking | W3-C2-V4-M1 |

## Terminal Type

**T1**
Standard DIN Post

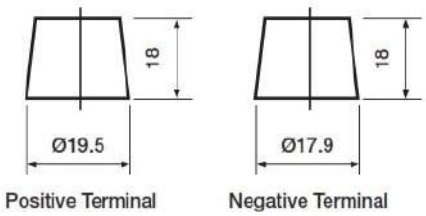


## Cell Assembly Layout

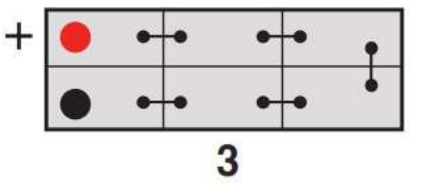


## Battery Hold-down



Data Sheet generated on 07/09/2021 – E&OE