



## Yuasa Scheda Tecnica

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

### Yuasa YBX7110 - Batterie YBX7000 EFB Start Stop Plus

#### Prestazione

Tensione	12V
Capacità (20 ore)	75Ah
Corrente di spunto A (EN1)	730A

#### Dimensioni

Lunghezza	317mm
Profondità	175mm
Altezza	175mm

#### Pesi e Misure

Peso medio con acido	19.8kg
----------------------	--------



#### Caratteristiche del Monoblocco

Tipo di monoblocco	LB4 DIN EFB
Fissaggi alla base	B3
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

#### Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	4A
Performance Marking	W3-C2-V3-M2


#### Tipologia dei terminali

#### Schema di Collegamento

#### Fissaggio batteria


#### T1

Standard DIN Post

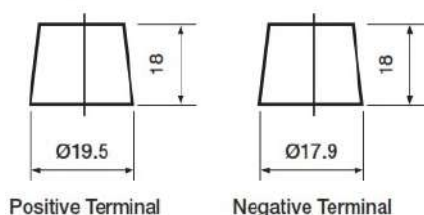

Positive Terminal

Negative Terminal

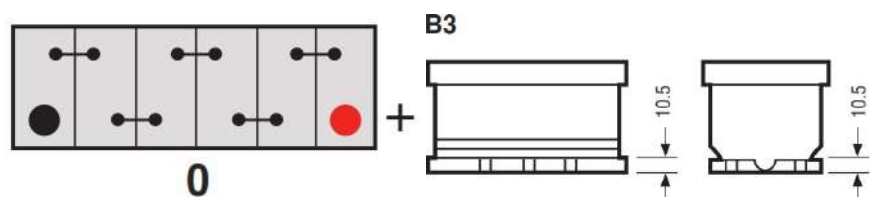

Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

### Yuasa YBX7110 - YBX7000 EFB Start Stop Plus Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	75Ah
Cold Cranking Amps (EN1)	730A

#### Dimensions

Length	317mm
Width	175mm
Height	175mm

#### Weights & Measures

Mean Weight with Acid	19.8kg
-----------------------	--------



#### Container Features

Case Type	LB4 DIN EFB
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V3-M2

#### Terminal Type

##### T1


Standard DIN Post

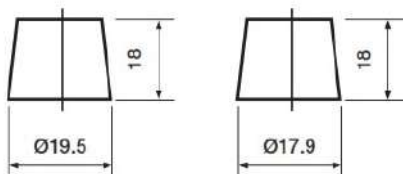


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

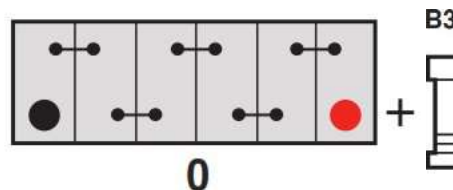

#### Battery Hold-down

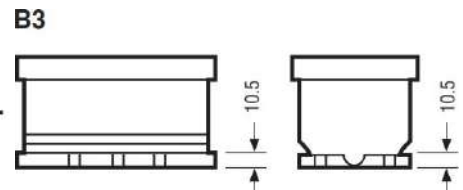

Data Sheet generated on 07/09/2021 - E&OE