



Yuasa Scheda Tecnica

Yuasa YBX9020 - Batterie YBX9000 AGM Start Stop Plus

Prestazione

Tensione	12V
Capacità (20 ore)	105Ah
Corrente di spunto A (EN1)	950A

Dimensioni

Lunghezza	393mm
Profondità	175mm
Altezza	190mm

Pesi e Misure

Peso medio con acido	29.6kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	L6 DIN AGM
Fissaggi alla base	B3
Maniglie	✓
Circuito di sfiato	✓
Applicazioni da semi trazione	✓
Tipo di coperchio	VRLA

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca VRLA
Separatore	AGM
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	6A
Performance Marking	W5-C2-V3-M3


Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria


T1

Standard DIN Post

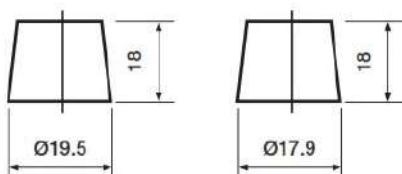

Positive Terminal

Negative Terminal

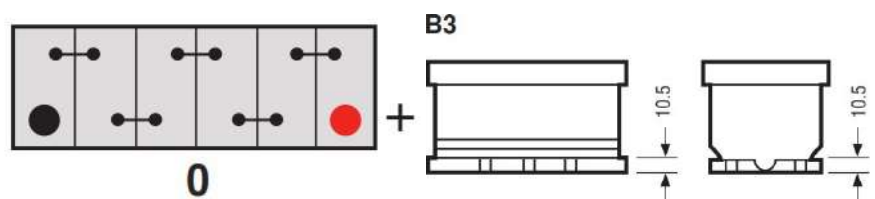

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX9020 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	105Ah
Cold Cranking Amps (EN1)	950A

Dimensions

Length	393mm
Width	175mm
Height	190mm



Weights & Measures

Mean Weight with Acid	29.6kg
-----------------------	--------

Container Features

Case Type	L6 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA AGM
VDA Roll Over Test	✓
Recommended Charge Rate	6A
Performance Marking	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

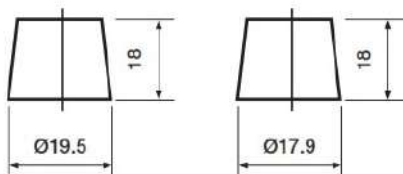


Positive Terminal

Negative Terminal

Cell Assembly Layout

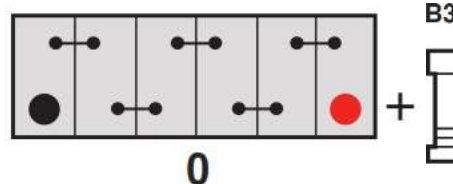

Battery Hold-down

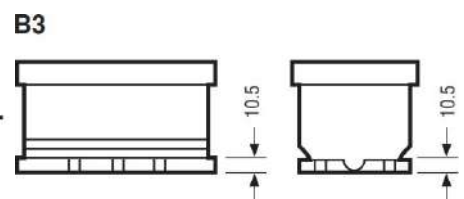

Data Sheet generated on 07/09/2021 - E&OE