



Yuasa Scheda Tecnica

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX9096 - Batterie YBX9000 AGM Start Stop Plus

Prestazione

Tensione	12V
Capacità (20 ore)	70Ah
Corrente di spunto A (EN1)	760A

Dimensioni

Lunghezza	278mm
Profondità	175mm
Altezza	190mm

Pesi e Misure

Peso medio con acido	20.5kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	L3 DIN AGM
Fissaggi alla base	B3
Maniglie	✓
Circuito di sfiato	✓
Applicazioni da semi trazione	✓
Tipo di coperchio	VRLA

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca VRLA
Separatore	AGM
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	4A
Performance Marking	W5-C2-V3-M3



Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria

T1

Standard DIN Post

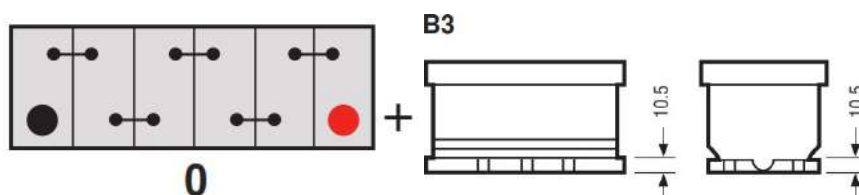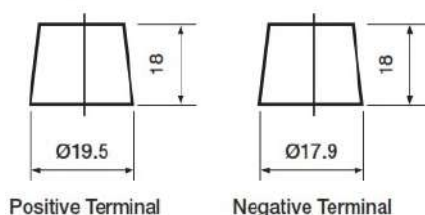

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	70Ah
Cold Cranking Amps (EN1)	760A

Dimensions

Length	278mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	20.5kg
-----------------------	--------



Container Features

Case Type	L3 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	✓
Performance Marking	4A
	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

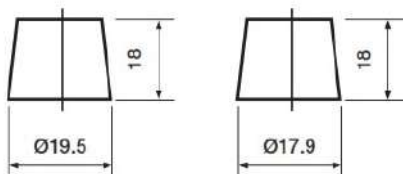


Positive Terminal

Negative Terminal

Cell Assembly Layout

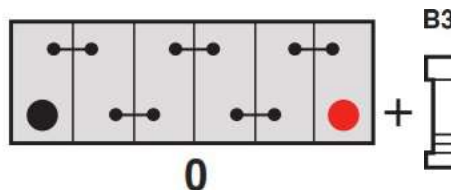

Battery Hold-down

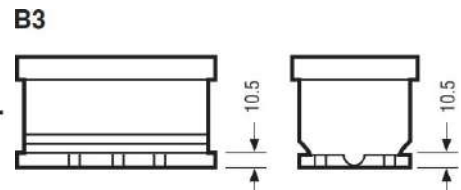

Data Sheet generated on 07/09/2021 - E&OE