



## Yuasa Scheda Tecnica

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

### Yuasa YBX9115 - Batterie YBX9000 AGM Start Stop Plus

#### Prestazione

Tensione	12V
Capacità (20 ore)	80Ah
Corrente di spunto A (EN1)	800A

#### Dimensioni

Lunghezza	317mm
Profondità	175mm
Altezza	190mm

#### Pesi e Misure

Peso medio con acido	23.2kg
----------------------	--------



#### Caratteristiche del Monoblocco

Tipo di monoblocco	L4 DIN AGM
Fissaggi alla base	B3
Maniglie	✓
Circuito di sfiato	✓
Applicazioni da semi trazione	✓
Tipo di coperchio	VRLA

#### Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca VRLA
Separatore	AGM
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	5A
Performance Marking	W5-C2-V3-M3



#### Tipologia dei terminali

#### Schema di Collegamento

#### Fissaggio batteria

#### T1

Standard DIN Post

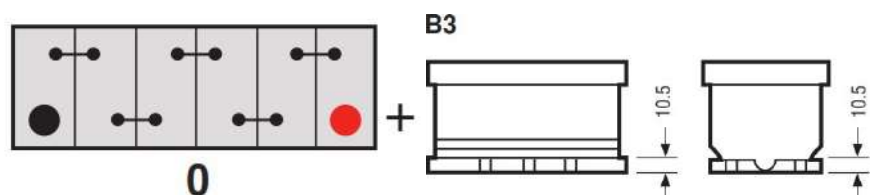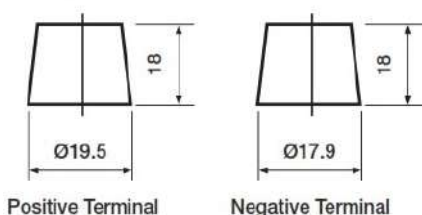

Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

### Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	80Ah
Cold Cranking Amps (EN1)	800A

#### Dimensions

Length	317mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	23.2kg
-----------------------	--------



#### Container Features

Case Type	L4 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
VDA Roll Over Test	✓
Recommended Charge Rate	5A
Performance Marking	W5-C2-V3-M3

#### Terminal Type

##### T1


Standard DIN Post

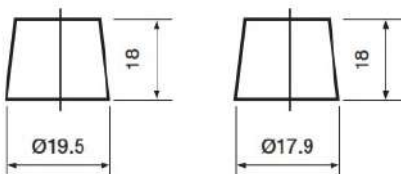


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

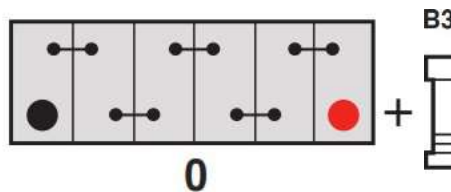

#### Battery Hold-down

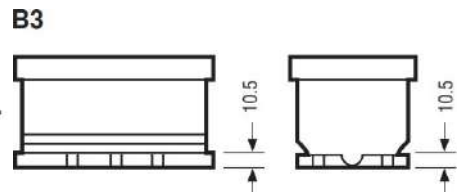

Data Sheet generated on 07/09/2021 - E&OE