



## Yuasa Scheda Tecnica

### Yuasa YBX1012 - Batterie YBX1000 CaCa

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Prestazione

Tensione	12V
Capacità (20 ore)	45Ah
Corrente di spunto A (EN1)	380A

#### Dimensioni

Lunghezza	207mm
Profondità	175mm
Altezza	190mm

#### Pesi e Misure

Peso medio con acido	12.7kg
Volume dell'acido	3.1 Litri



#### Caratteristiche del Monoblocco

Tipo di monoblocco	L1 DIN
Fissaggi alla base	B3
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Valvola di fiato centrale

#### Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Corrente di carica raccomandata	3A
Performance Marking	W3-C2-V2-E1



#### Tipologia dei terminali

#### Schema di Collegamento

#### Fissaggio batteria

#### T1

Standard DIN Post

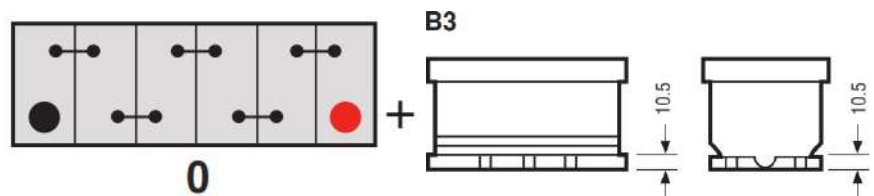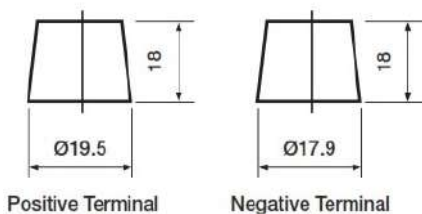

Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX1012 - YBX1000 CaCa Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	380A

#### Dimensions

Length	207mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	12.7kg
Acid Volume	3.1 litres



#### Container Features

Case Type	L1 DIN
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	Central Venting


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	3A
Performance Marking	W3-C2-V2-E1

#### Terminal Type

##### T1


Standard DIN Post

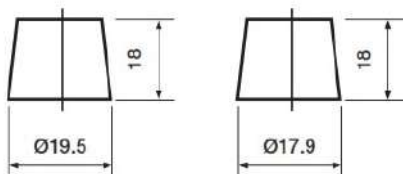

Positive Terminal

Negative Terminal


#### Cell Assembly Layout

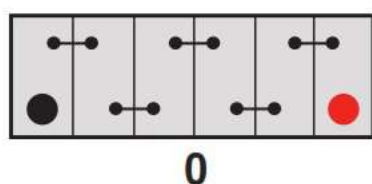

0

#### Battery Hold-down

##### B3

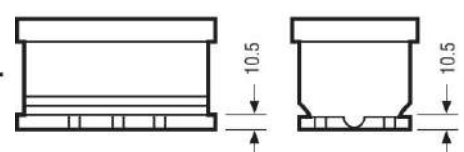

Data Sheet generated on 07/09/2021 - E&OE