



## Yuasa Scheda Tecnica

### Yuasa YBX7054 - Batterie YBX7000 EFB Start Stop Plus

#### Prestazione

|                            |      |
|----------------------------|------|
| Tensione                   | 12V  |
| Capacità (20 ore)          | 40Ah |
| Corrente di spunto A (EN1) | 400A |

#### Dimensioni

|            |       |
|------------|-------|
| Lunghezza  | 197mm |
| Profondità | 128mm |
| Altezza    | 227mm |

#### Pesi e Misure

|                      |           |
|----------------------|-----------|
| Peso medio con acido | 10.7kg    |
| Volume dell'acido    | 2.7 Litri |



#### Caratteristiche del Monoblocco

|                    |                   |
|--------------------|-------------------|
| Tipo di monoblocco | B20 JIS EFB (M42) |
| Fissaggi alla base | N                 |
| Tipo di coperchio  | Tappi a vista     |


#### Tecnologia

|                                 |             |
|---------------------------------|-------------|
| Pastiglia antideflagrante       | ✓           |
| Tecnologia                      | Ca/Ca       |
| Separatore                      | PE          |
| Corrente di carica raccomandata | 2A          |
| Performance Marking             | W3-C2-V3-M1 |


#### Tipologia dei terminali

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Schema di Collegamento

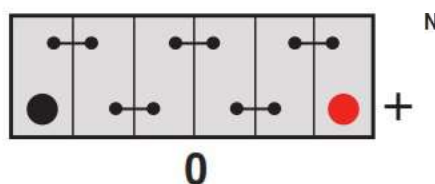

#### Fissaggio batteria



Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX7054 - YBX7000 EFB Start Stop Plus Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 40Ah |
| Cold Cranking Amps (EN1) | 400A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 197mm |
| Width  | 128mm |
| Height | 227mm |

#### Weights & Measures

|                       |            |
|-----------------------|------------|
| Mean Weight with Acid | 10.7kg     |
| Acid Volume           | 2.7 litres |



#### Container Features

|           |                   |
|-----------|-------------------|
| Case Type | B20 JIS EFB (M42) |
| Hold Down | N                 |
| Lid Type  | Raised Plug       |


#### Technology

|                           |             |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓           |
| Separator                 | Ca/Ca       |
| Recommended Charge Rate   | PE          |
| Performance Marking       | 2A          |
|                           | W3-C2-V3-M1 |


#### Terminal Type

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Cell Assembly Layout

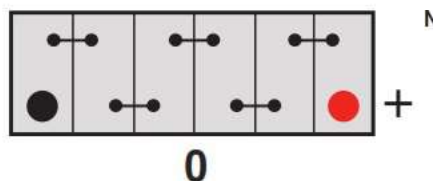

#### Battery Hold-down



Data Sheet generated on 07/09/2021 - E&OE