


CUSTOMER DATASHEET


Printed: 10/02/2022

Product Management
Transportation Europe

Central Article Code: F21100W01-A Created: 06/09/2005

Local Code: EG145A Modified: 04/03/2014

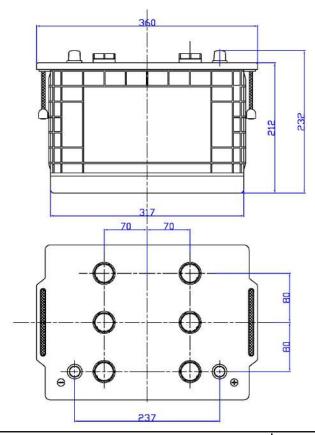

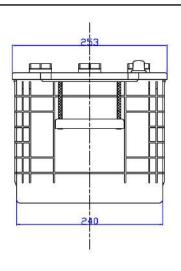

Final Outlook F2101-A Approval date 01/07/2006

D			\frown		N/	Α	NI.	~	c
	ĸ	Г,	u	ĸ	IVI	А	N	u	3

Voltage (V): 12 V

C20 (Ah): 145.0 20 h Cranking (A): 1000 EN

Charge: WET

Technology: Vented/Flooded

Grid: Hybrid

Vibration: V2 (30Hz+/-2Hz/6g/2h)

Endurance: E2 (90 cycles@50%)

STD. DIMENSIONS

 Length (mm \pm 2):
 360

 Width (mm \pm 2):
 253

 Height (mm \pm 2):
 240

 Total Weight (kg \pm 5%):
 38.10

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type: F21
Hold Down: B0
H.D. Adapter: No

COVER

BLACK

Type: Flat/Screw BLACK

Polarity: ETN 6

Terminals: EN taper post

Terminal Adapter: No SOCI: No

Ventilation: Independent

Filter: No Lateral Plug: No

PLUGS

Type: 6 x M27 BLACK

HANDLES

Type: 2 x Rope (Rigid holder) BLACK

OTHERS

Degassing Tube: No