


Central Article Code: D05090A22-A
 Local Code: EP1500

Created: 08/06/2010
 Modified: 23/07/2018

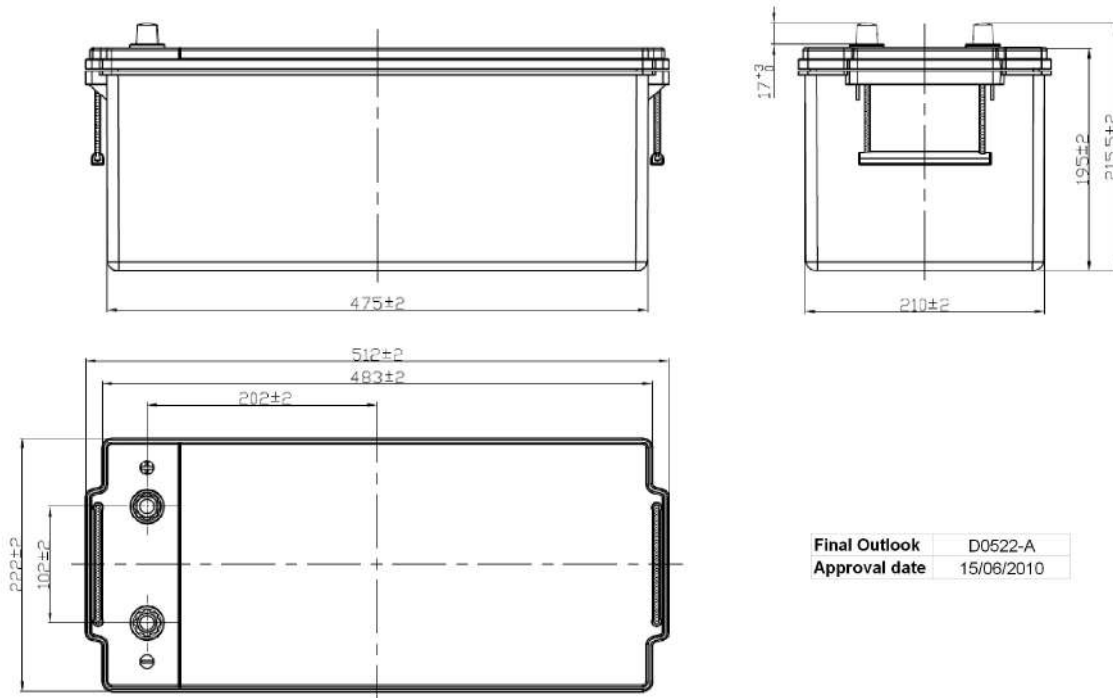

Final Outlook	D0522-A
Approval date	15/06/2010

PERFORMANCES		CONTAINER	
Voltage (V):	12 V	Type:	D05 BLACK
C20 (Ah):	180.0 20 h	Hold Down:	B0
Cranking (A):	900 EN	H.D. Adapter:	No
Charge:	CHARGED	COVER	
Technology:	AGM	Type:	Double without Hand BLUE LIGHT
Grid:	Ca/Ca	Polarity:	ETN 3
Vibration:	V1 (30Hz+/-2Hz/3g/2h)	Terminals:	EN taper post
Endurance:	300 cycles@75%	Terminal Adapter:	No
		SOCI:	No
		Ventilation:	Central
		Filter:	1 Filter
		Lateral Plug:	No
STD. DIMENSIONS		PLUGS	
Length (mm ± 2):	513	Type:	1 x Valve+Cover BLUE LIGHT
Width (mm ± 2):	223	HANDLES	
Height (mm ± 2):	223	Type:	2 x Rope (Rigid holder) BLACK
Total Weight (kg ± 5%):	50.00	OTHERS	
		Degassing Tube:	No

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.