


Central Article Code: D05090R20-A
 Local Code: ET1300

Created: 31/03/2009
 Modified: 05/09/2018

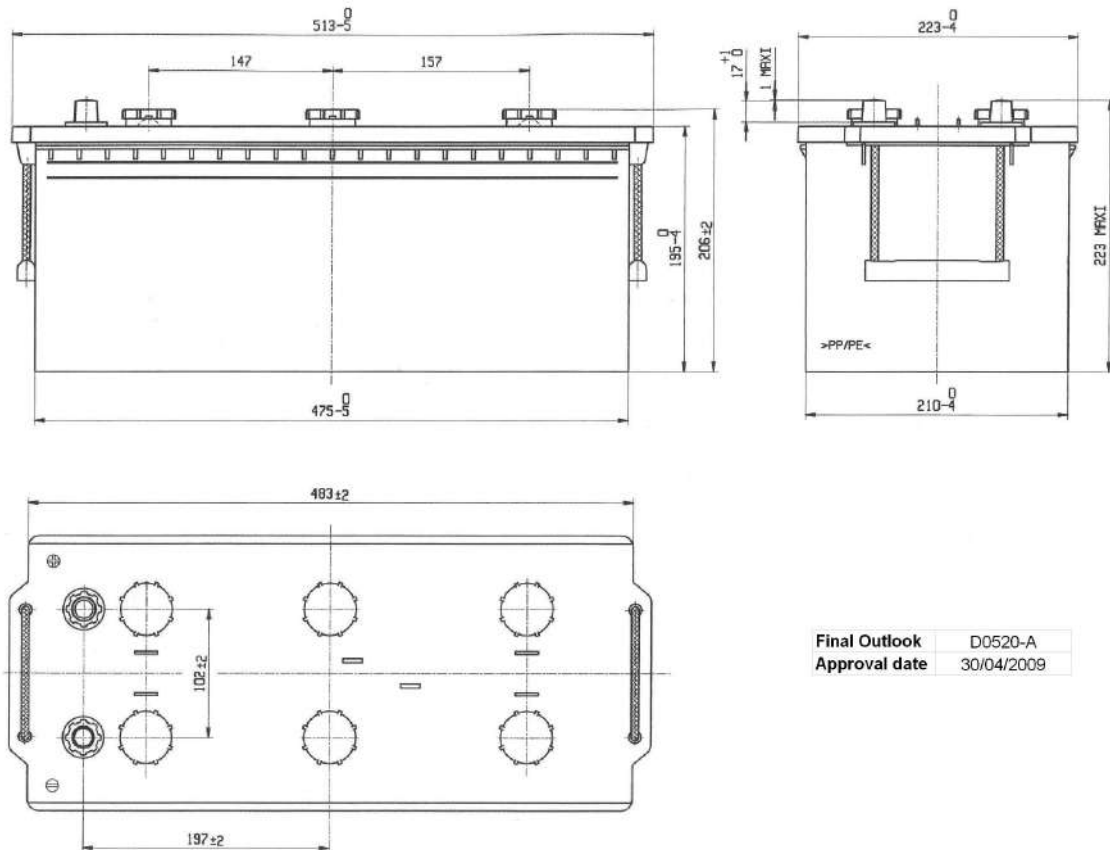

Final Outlook D0520-A
 Approval date 30/04/2009

PERFORMANCES		CONTAINER	
Voltage (V):	12 V	Type:	D05 WHITE
C20 (Ah):	180.0 20 h	Hold Down:	B0
Cranking (A):	900 EN	H.D. Adapter:	No
Charge:	WET	COVER	
Technology:	Semi-Traction	Type:	Flat/Screw WHITE
Grid:	4% Sb	Polarity:	ETN 3
Vibration:	V3 (30Hz+/-2Hz/6g/20h)	Terminals:	EN taper post
Endurance:	300 cycles@75%	Terminal Adapter:	No
		SOCI:	No
		Ventilation:	Independent
		Filter:	No
		Lateral Plug:	No
STD. DIMENSIONS		PLUGS	
Length (mm ± 2):	513	Type:	6 x M27(STS) RED
Width (mm ± 2):	223	HANDLES	
Height (mm ± 2):	223	Type:	2 x Rope (Rigid holder) BLACK
Total Weight (kg ± 5%):	49.70	OTHERS	
		Degassing Tube:	No

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.