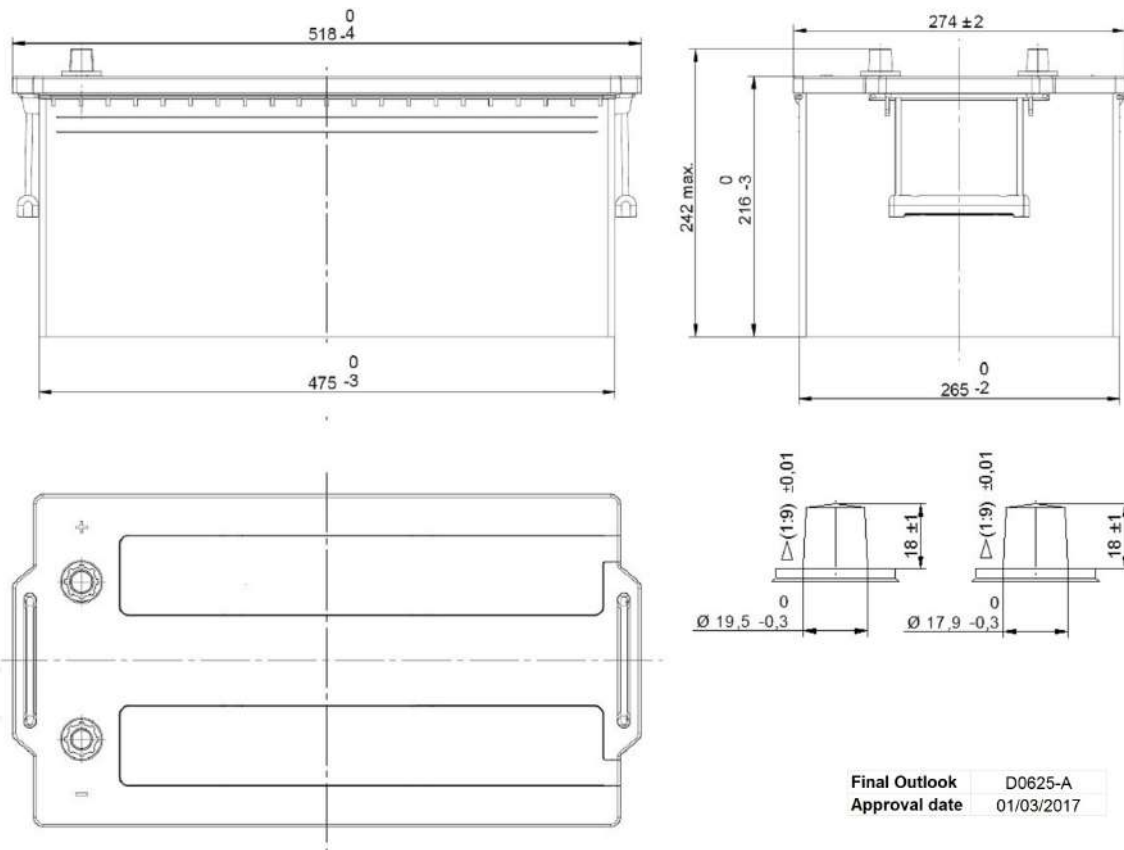


Central Article Code: D06119C25-A

Created: 29/07/2016

Local Code: TE2353

Modified: 31/07/2020


 Final Outlook D0625-A  
 Approval date 01/03/2017

## PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	235.0	20 h
Cranking (A):	1200	EN
Charge:	WET	
Technology:	Vented/Flooded	
Grid:	Ca/Ca	
Vibration:	V4 (3 axis) ref. EN-2015	
Endurance:	E2 (150c@50%) ref. EN-2015	

## STD. DIMENSIONS

Length (mm ± 2):	518
Width (mm ± 2):	274
Height (mm ± 2):	240
Total Weight (kg ± 5%):	58.20

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

## CONTAINER

Type:	D06	GREY MEDIUM
Hold Down:	B0	
H.D. Adapter:	No	

## COVER

Type:	Flat/Press	GREY MEDIUM
Polarity:	ETN 3	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	1 Filter per Vent	
Lateral Plug:	No	

## PLUGS

Type:	2 x VCL Vent	GREY MEDIUM
-------	--------------	-------------

## HANDLES

Type:	2 x Rope (Rigid holder)	BLACK
-------	-------------------------	-------

## OTHERS

Degassing Tube:	No
-----------------	----