



Yuasa Scheda Tecnica

Yuasa YBX3102 - Batterie YBX3000 SMF

Prestazione

Tensione	12V
Capacità (20 ore)	42Ah
Corrente di spunto A (EN1)	390A

Dimensioni

Lunghezza	175mm
Profondità	175mm
Altezza	190mm

Pesi e Misure

Peso medio con acido	10.5kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	L0 DIN
Schema polarità	1
Fissaggi alla base	B3
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✓
Corrente di carica raccomandata	2A
Performance Marking	W4-C2-V3-E1


Tipologia dei terminali

Schema di Collegamento


Fissaggio batteria

T1


Standard DIN Post



Positive Terminal



Negative Terminal

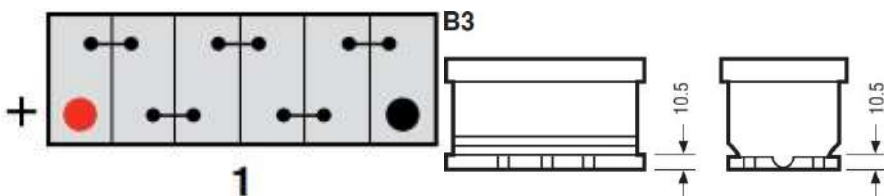

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX3102 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	42Ah
Cold Cranking Amps (EN1)	390A

Dimensions

Length	175mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	10.5kg
-----------------------	--------



Container Features

Case Type	L0 DIN
Cell Layout	1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca PE
VDA Roll Over Test	✓
Recommended Charge Rate	2A
Performance Marking	W4-C2-V3-E1

Terminal Type

T1


Standard DIN Post

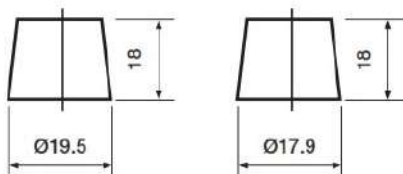


Positive Terminal

Negative Terminal

Cell Assembly Layout

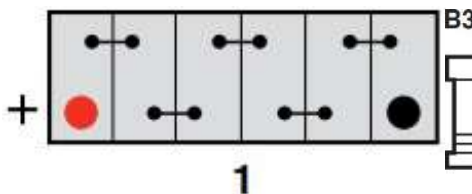

Battery Hold-down

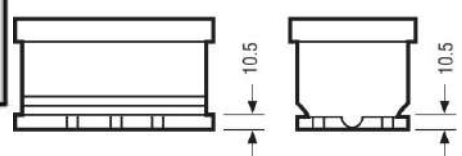

Data Sheet generated on 07/09/2021 - E&OE